


EP 20 EASY



1.1				Manitou
1.2				EP 20 Easy
1.3				-
1.4				
1.5			Q	2000 kg
1.6			c	600 mm
1.8			x	980 mm
1.9			y	1415 mm
2.1				515 kg
2.2	/			868 kg / 1647 kg
2.3	/			390 kg / 125 kg
3.1				
3.2				250 x 80
3.3				85 x 70
3.4	/			2 / 100 x 40
3.5.2	/ /			1 / 2 / 2
3.6			b10	540 mm
3.7			b11	370 mm
4.15			h13	85 mm
4.19			l1	1770 mm
4.20			l2	620 mm
4.21			b1	740 mm
4.22	/ /		s / e / l	64 mm x 170 mm x 1150 mm
4.25			b5	540 mm
4.32			m2	20 mm
4.33	(1000 x 1200)		Ast	1831 mm
4.34	(800 x 1200)		Ast	2031 mm
4.35			Wa	1556 mm
4.4			h3	125 mm
4.9			h14	1020 mm
4.9			h14	1350 mm
5.1	/			6 km/h / 6 km/h
5.2	/			30 mm/s / 45 mm/s
5.3	/			50 m/s / 35 m/s
5.7	- /			8 % / 15 %
5.10				
5.11				
6.1	(S2 60 min)			1.10 kW
6.2	S3 15			0.80 kW
6.3	DIN 43531/35/36 A B C			DIN 43535-B
6.4				24 V / 180 Ah
8.4	/			< 75 dB

EP 20 Easy -

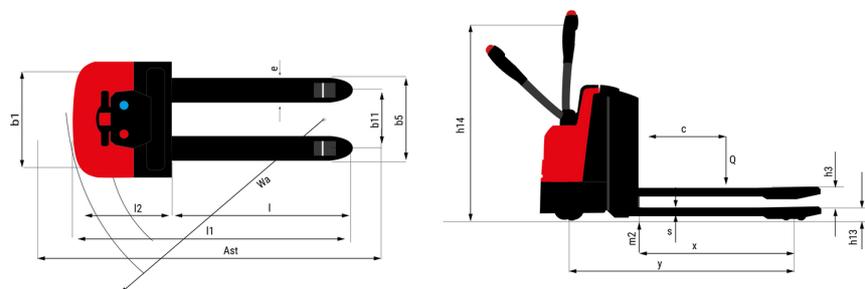

- Anti-crushing safety device
- Emergency stop
- Turtle button



B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France
+33 (0)2 40 09 10 11 - +33 (0)2 40 09 10 97
www.manitou.com



Manitou

Manitou

MANITOU BF SA - - 39 668 399 - 857 802 508 RCS Nantes