

Технический паспорт ТЕХНИЧЕСКОЕ ОПИСАНИЕ :


# МНТ-Х 790 MINING



 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                                  |           | Метрический                                            |
|---------------------------------------------|-----------|--------------------------------------------------------|
| Max. capacity                               |           | 9000 kg                                                |
| Load center of gravity                      | c         | 600 mm                                                 |
| Max. lifting height                         |           | 6.80 m                                                 |
| Max. outreach                               |           | 3.70 m                                                 |
| Weight and dimensions                       |           |                                                        |
| Unladen weight (with forks)                 |           | 13160 kg                                               |
| Ground clearance                            | m4        | 0.44 m                                                 |
| Wheelbase                                   | y         | 2.87 m                                                 |
| Length to face of forks                     | l2        | 5.21 m                                                 |
| Overall width                               | b1        | 2.47 m                                                 |
| Overall height                              | h17       | 2.50 m                                                 |
| Overall cab width                           | b4        | 0.93 m                                                 |
| Tilt-down angle                             | a5        | 125 °                                                  |
| Tilt-up angle                               | a4        | 12 °                                                   |
| External turning radius (over tyres)        | Wa1       | 4.89 m                                                 |
| Forks length / width / section              | l / e / s | 1200 mm x 200 mm / 60 mm                               |
| Wheels                                      |           |                                                        |
| Standard tires                              |           | 445/65 R22,5                                           |
| Number of front wheels / rear wheels        |           | 2 / 2                                                  |
| Steering wheels (front / rear)              |           | 2 / 2                                                  |
| Drive wheels (front / rear)                 |           | 2 / 2                                                  |
| Steering mode                               |           | 2 wheel steer, 4 wheel steer, Crab mode                |
| Engine                                      |           |                                                        |
| Engine brand                                |           | John Deere                                             |
| Engine norm                                 |           | Stage IIIA                                             |
| Number of cylinders / Capacity of cylinders |           | 4 - 4567 cm³                                           |
| I.C. Engine power rating / Power            |           | 143 Hp / 105 kW                                        |
| Max. torque / Engine rotation               |           | 602 Nm@1500 rpm                                        |
| Engine cooling system                       |           | Water                                                  |
| Battery voltage                             |           | 12 V                                                   |
| Drawbar pull                                |           | 10905 daN                                              |
| Transmission                                |           |                                                        |
| Transmission type                           |           | Hydrostatic                                            |
| Number of gears (forward / reverse)         |           | 2 / 2                                                  |
| Max. travel speed                           |           | 35 km/h                                                |
| Parking brake                               |           | Automatic negative parking brake                       |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Hydraulics                                  |           |                                                        |
| Hydraulic pump type                         |           | Variable displacement pump                             |
| Hydraulic flow - Pressure                   |           | 185 l/min - 270 bar                                    |
| Tank capacities                             |           |                                                        |
| Engine oil                                  |           | 13 l                                                   |
| Hydraulic oil                               |           | 151 l                                                  |
| Fuel tank                                   |           | 165 l                                                  |
| Noise and vibration                         |           |                                                        |
| Noise at driving position (LpA)             |           | 79.70 dB                                               |
| Noise to environment (LwA)                  |           | 103 dB                                                 |
| Vibration on hands/arms                     |           | < 2.50 m/s²                                            |
| Miscellaneous                               |           |                                                        |
| Safety / Safety cab homologation            |           | Standard EN 15000 - ROPS - FOPS level 2 cab            |
| Controls                                    |           | JSM                                                    |

## MHT-X 790 Mining - габаритный чертеж

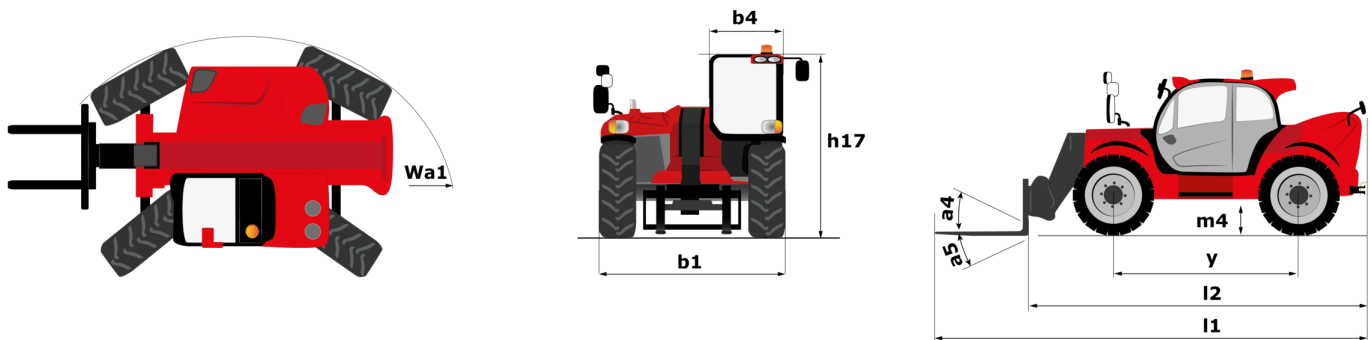

## MHT-X 790 Mining - Диаграмма нагрузки


Machine on tyres with forks LC 600 mm Metric




Machine on tyres with winch 9000 kg (Metric)




Machine on tyres with 3-hook jib 9000 kg (Metric)

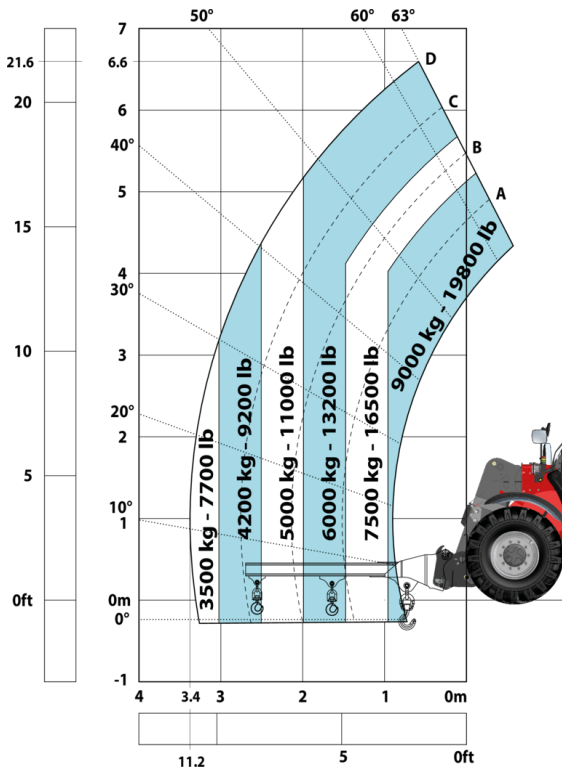


Machine on tyres with platform Metric

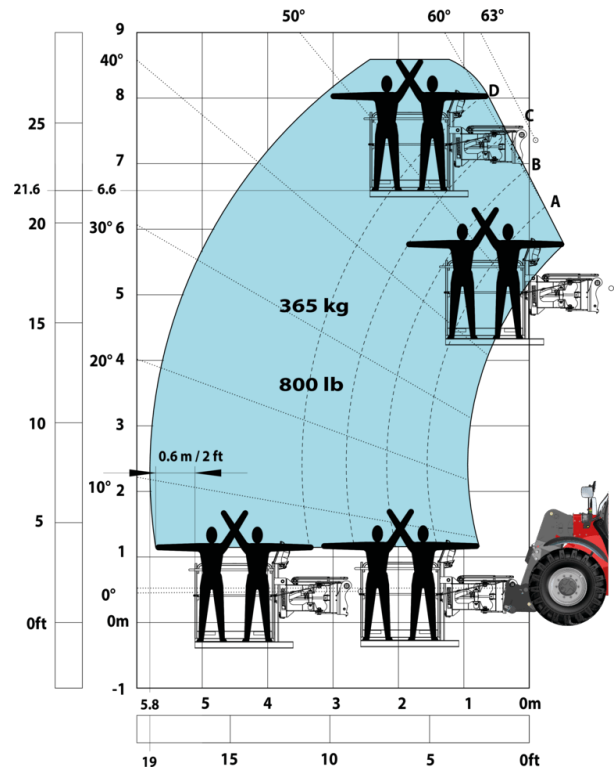


Machine on tyres with underground mining platform  
(Metric)

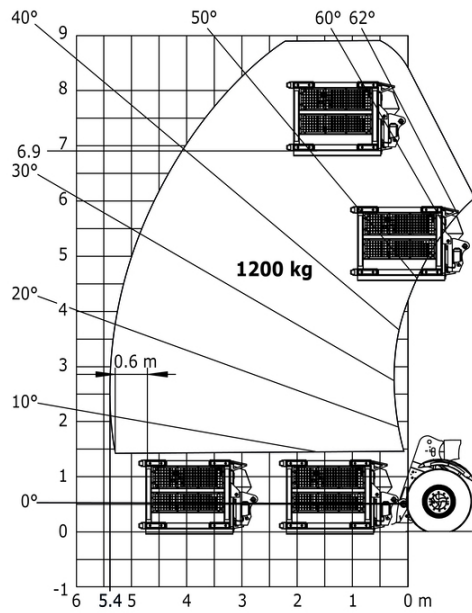


Machine on tyres with tyre handler TH 35 (Metric)

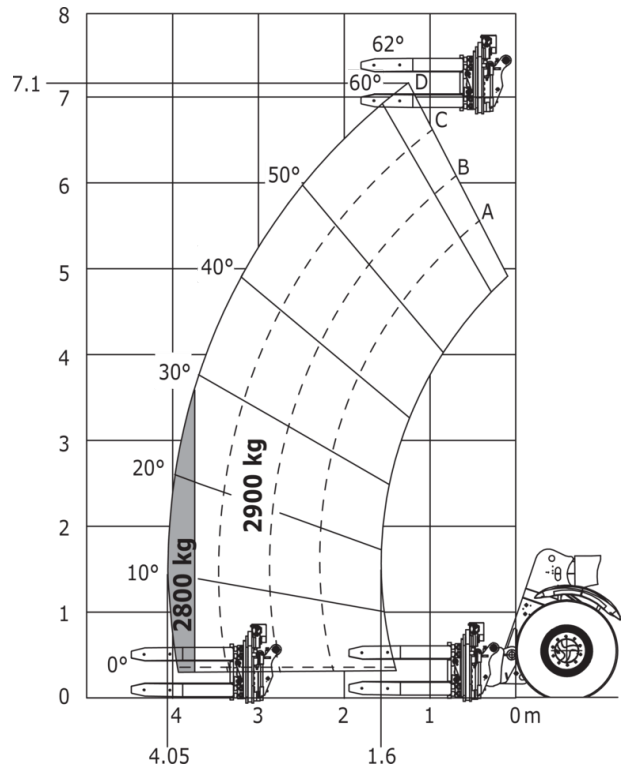


Machine on tyres with tyre handler TH 49 (Metric)

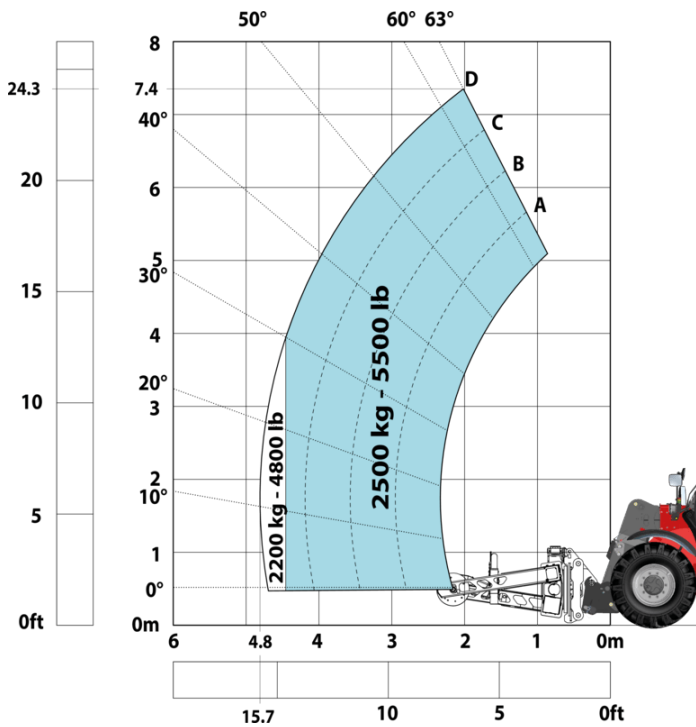

Machine on tyres with tyre handler TH 51 (Metric)

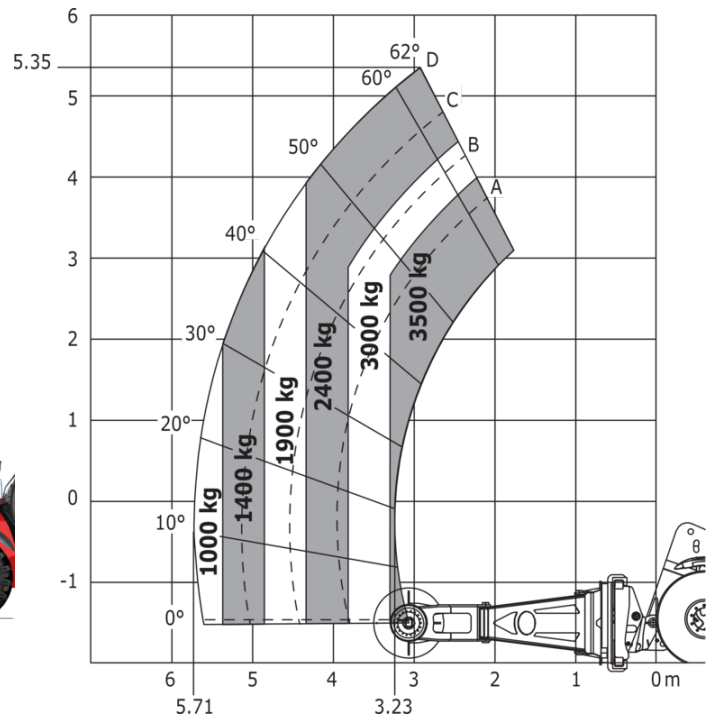

## Machine on tyres with cylinder handler CH 4 (Metric)

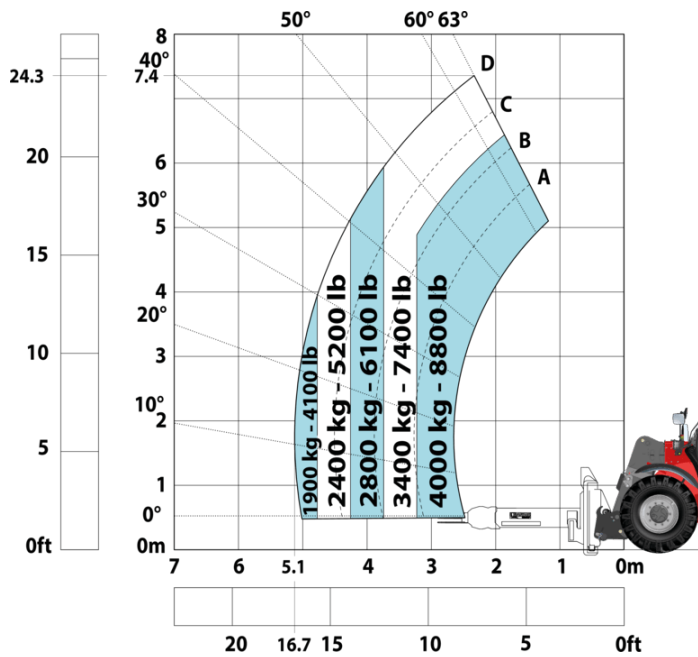

## Mining Specifications

|                                                        | MHT-X 790 Mining |
|--------------------------------------------------------|------------------|
| <b>Lifting function</b>                                |                  |
| Clamp predisposition (controls from cabin)             | S                |
| Comfort Ride Control (CRC) boom suspension             | 0                |
| Working platform predisposition with remote control    | 0                |
| <b>Lighting</b>                                        |                  |
| Brake Lights ON When Park Brake ON                     | S                |
| Flat Led Rotating Beacon                               | S                |
| LED Flashing Lights On Cabin (Marker Lights)           | S                |
| LED tramming lights                                    | S                |
| LED work lights on the boom (x2)                       | S                |
| LED working lights on cab (x4 : 2 front + 2 rear)      | S                |
| <b>Motorization/Power</b>                              |                  |
| Exhaust fume purification system                       | S                |
| Hydraulic hose sleeve burst protection                 | 0                |
| Radiator safety cap                                    | S                |
| <b>Operator station</b>                                |                  |
| Roof and Windshield Guard                              | S                |
| <b>Other options</b>                                   |                  |
| Battery + Starter Isolators + Jump Start Receptacle    | S                |
| <b>Secondary functions</b>                             |                  |
| Automatic Greasing System (AGS) - chassis + boom       | 0                |
| <b>Security</b>                                        |                  |
| "Guardian Angel" System Level 1                        | S                |
| 360° visibility safety system                          | S                |
| Boom cylinder lock                                     | S                |
| Emergency steering                                     | 0                |
| Emergency stop: 1 in cab, 2 on external                | S                |
| Extinguisher brackets (x3)                             | S                |
| Fire suppression system                                | 0                |
| Fuse board protection - MHT's                          | S                |
| High visibility reflective strips                      | S                |
| Loose wheel nut indicators                             | S                |
| Marking - Warning & Danger decals                      | S                |
| Mining protection grids: right, left and back windows  | S                |
| Negative brakes on front & rear axles                  | S                |
| Rear and lateral camera with cab screen                | S                |
| Steel Protection Guards on all working and road lights | S                |
| System with attachments recognition (E-reco)           | S                |
| Wheel chocks                                           | S                |

# Оборудование

| Стандартная                                            |
|--------------------------------------------------------|
| "Guardian Angel" System Level 1                        |
| 360° visibility safety system                          |
| Battery + Starter Isolators + Jump Start Receptacle    |
| Boom cylinder lock                                     |
| Brake Lights ON When Park Brake ON                     |
| Clamp predisposition (controls from cabin)             |
| Emergency stop: 1 in cab, 2 on external                |
| Exhaust fume purification system                       |
| Extinguisher brackets (x3)                             |
| Flat Led Rotating Beacon                               |
| Fuse board protection - MHT's                          |
| High visibility reflective strips                      |
| LED Flashing Lights On Cabin (Marker Lights)           |
| LED tramming lights                                    |
| LED work lights on the boom (x2)                       |
| LED working lights on cab (x4 : 2 front + 2 rear)      |
| Loose wheel nut indicators                             |
| Marking - Warning & Danger decals                      |
| Mining protection grids: right, left and back windows  |
| Negative brakes on front & rear axles                  |
| Radiator safety cap                                    |
| Rear and lateral camera with cab screen                |
| Roof and Windshield Guard                              |
| Steel Protection Guards on all working and road lights |
| System with attachments recognition (E-reco)           |
| Wheel chocks                                           |

| Оptionный                                           |
|-----------------------------------------------------|
| Automatic Greasing System (AGS) - chassis + boom    |
| Comfort Ride Control (CRC) boom suspension          |
| Emergency steering                                  |
| Fire suppression system                             |
| Hydraulic hose sleeve burst protection              |
| Working platform predisposition with remote control |

**Головной офис**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France (Франция)

Телефон: 00 33 (0)2 40 09 10 11 - Факс: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)

В данной брошюре описываются версии конфигурации и опции продуктов Manitou, которые могут отличаться в зависимости от оборудования. Описанное в данной брошюре оборудование может, в зависимости от версии, быть стандартным, опциональным или недоступным. Компания Manitou оставляет за собой право в любое время изменять приведенные и описанные характеристики без предварительного уведомления. Указанные технические характеристики не являются обязательными для производителя. Для получения дополнительной информации обратитесь к своему дилеру Manitou. Этот документ не имеет обязывающего, договорного характера. Описание продукции не имеет обязывающего, договорного характера. Список технических характеристик не является исчерпывающим. Логотипы и средства визуальной идентификации являются собственностью Manitou, их несанкционированное использование запрещено. Все права защищены. Фотографии и схемы в этой брошюре предоставлены только для ознакомления и в качестве справочной информации.

Manitou BF SA — Компания с ограниченной ответственностью и советом директоров – Акционерный капитал: 39 668 399 евро — Номер 857 802 508 в Реестре коммерсантов и предприятий Нанта