

Ficha técnica :


MLA 3-25 H-C



 **MANITOU**
HANDLING YOUR WORLD

| Capacities | | Métrico |
|--|-----|--|
| Static tipping load with bucket (straight) | | 1613 kg |
| Static tipping load with bucket (full turn) | | 1416 kg |
| Static tipping load with forks (straight) | | 1208 kg |
| Static tipping load with forks (full turn) | | 1061 kg |
| Max. height of bucket pivot point | h35 | 2488 mm |
| Weight and dimensions | | |
| Unladen weight (with forks) with 4-post canopy | | 2100 kg |
| Wheelbase | y | 1650 mm |
| Overall cab width | b4 | 991 mm |
| Overall height with 4 posts canopy | h38 | 2258 mm |
| Dump reach - Full height | r6 | 344 mm |
| Hood Height | h40 | 1405 mm |
| Overall Operating Height - Fully Raised | h27 | 3696 mm |
| Articulation angle | a19 | 45 ° |
| Maximum oscillation angle | | 11 ° |
| Overall length with bucket | l16 | 4154 mm |
| Overall width less bucket | b1 | 1100 mm |
| Overall length - Less Bucket | l2 | 3458 mm |
| Rear overhang | c6 | 995 mm |
| Dump angle - Fully raised | a5 | 39 ° |
| Dump Height - Fully Raised | h29 | 2126 mm |
| Maximum Rollback Angle - Fully Raised | a4 | 50 ° |
| Digging Position | h32 | -79 mm |
| Ground clearance | m4 | 320 mm |
| Clearance Radius - Front with Bucket | b18 | 3246 mm |
| Clearance Radius - Less bucket | b14 | 2767 mm |
| Ground Plane to Bucket Edge Height | h42 | 2655 mm |
| Tread width (wheel center) | b29 | 836 mm |
| Attachment Pivot Clearance | | 103 mm |
| Height from ground to axle center | m8 | 214 mm |
| Bucket Width | e1 | 1520 mm |
| Front Wheel Center to Pivot Pin | m3 | 669 mm |
| Height to Hinge Pin - Fully Raised | h28 | 2520 mm |
| Engine | | |
| Engine brand | | Perkins |
| Engine model | | 403J-17 |
| Engine nom | | Stage V |
| Number of cylinders | | 3 |
| I.C. Engine power rating / Power | | 24.70 Hp / 18.40 kW |
| Max. torque / Engine rotation | | 85 Nm / 1800 rpm |
| Engine cooling system | | Water |
| Transmission | | |
| Transmission type | | Hydrostatic |
| Number of gears (forward / reverse) | | 2 / 2 |
| Max. travel speed (may vary according to applicable regulations) | | 20 km/h |
| Service brake | | Hydraulic drum brake on front axle, acting on all 4 wheels |
| Hydraulics | | |
| Hydraulic pump type | | Gear pump |
| Hydraulic flow - Pressure | | 30 l/min / 207 bar |
| High-Flow Option (l/min) | | 30 l/min |
| Tank capacities | | |
| Hydraulic oil | | 24 l |
| Fuel tank | | 35 l |

MLA 3-25 H-C - Diagrama dimensional

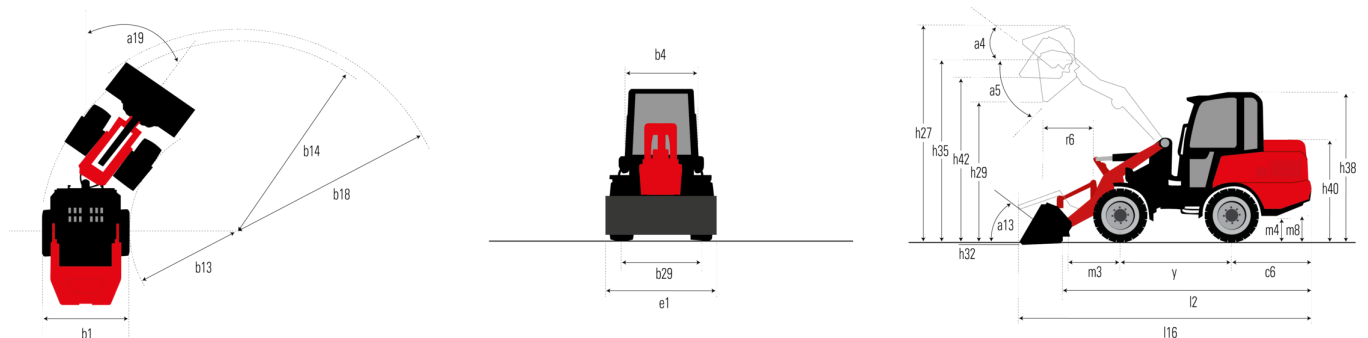



Oficina Central

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes