Technical sheet:


MLA 4-50 H-C





State Spaine land with backet (resignify) State Spaine land with backet (resignify) State Spaine land with forsk (straine) State Spaine land with sex (MLA 4-30 H-C GIE	ated off November 10, 2023 at 2.00 AW OT
State Ispany Load with bucker (tall ulmo) State Ispany Load with Code (state) Whitehase Whitehase Whitehase Whitehase Whitehase Y 1555 mm December Load (state) Whitehase Y 1555 mm December Load (state) Whitehase December Load (state) State Ispany	Capacities		Metric
Sinté ippois loat with fores (ettaup) Sinté ippois loat with fores (ettaup) Mars. Height of buscét prior (pour lotte (et lui project) Mars. Height (with fiste) with 4-peet anney Merchand dimension Unitéer weight (with fiste) with 4-peet anney Merchand (et lui project) Unitéer weight (with fiste) with 4-peet anney Merchand (et lui project) Merchand (et lu	Static tipping load with bucket (straight)		1765 kg
Sake to prince from the first of that may be a state of the first of the	Static tipping load with bucket (full turn)		1550 kg
Name Part	Static tipping load with forks (straight)		1310 kg
Washinated immensions Case in the commension of the commension	Static tipping load with forks (full turn)		1150 kg
Unliader weight (with fixely with 4-post canopy 155 mm 150 m	Max. height of bucket pivot point	h35	2488 mm
Wheelbase y 15.00 mm Owerall neight with 4 pasts canopy b4 991 mm Owerall neight with 4 pasts canopy b3 22.56 mm Dues practed, Full height 16 34.4 mm Hock Height 16 34.4 mm Hock Height 100 140.5 mm Also immune cellisation angle 11° 22.7 mm Userall length with budset 16 2.72 mm Owerall length height less bucket b1 1100 mm Owerall length height less bucket b1 100 mm Owerall length height less bucket b1 1100 mm Owerall length height less bucket b1 120 mm Maximum Sollance Alley Fally Raised b2 120 mm Maximum Sollance Alley Fally Raised b2 2 20 mm Less carries and	Weight and dimensions		
Decent and width with 4 posts canopy 188 2258 mm	Unladen weight (with forks) with 4-post canopy		2246 kg
Owerll and with With 4 posts canopy b34 991 mm Dump neach Full height 66 344 mm Dump neach Full height M0 1405 mm Overall digerating height - Fully Raised h27 3310 mm Anticulation angle a19 45° Overall dight with bucket 116 4279 mm Overall widn his saturation b1 1100 mm Owerall widn his saturation 66 1120 mm Owerall widn his saturation 66 1120 mm Owerall widn his saturation 66 1120 mm Owerall widn his saturation 53 30° Owerall widn his saturation 53 30° Owerall widn his saturation 52 2126 mm Olicarrace hadraus - Fent with Bucket 58 326 mm Olicarrace hadraus - Fent with Bucket 58 326 mm Olicarrace hadraus - Fent with Bucket <t< td=""><td>Wheelbase</td><td>У</td><td>1650 mm</td></t<>	Wheelbase	У	1650 mm
Devental Perlight with 4 posts casopy Devental Perlight with 4 posts casopy Devental Perlight with 4 posts casopy Devental Coloration Perlight Perli	Overall cab width		991 mm
Dump meach - Full height 6 344 mm Hood Height h60 135 mm Oreall Operating Meight - Fully Raised a39 45° 3310 mm Articulation angle a19 45° 11° Owerall siden files stocket 116 4279 mm Owerall widn files stocket 12 5838 mm Owerall siden files stocket 12 293 mm Owerall siden files	Overall height with 4 posts canopy	h38	2258 mm
Noor		r6	344 mm
OwenII Opening Height - Fully Raised 192 43 10 mm Afterlulation angle 19 45 1 Verall length with bucket 116 4279 mm Overall length with bucket 15 1 1100 mm Overall length - Less Bucket 12 3553 mm Overall length - Less Bucket 12 3553 mm Overall length - Less Bucket 12 3553 mm Outrag per Fully raised 15 39 ° Outrag per Fully raised 44 80 ° Massimum Rollback Angle - Fully Raised 44 80 ° Massimum Rollback Angle - Fully Raised 44 80 ° Massimum Rollback Angle - Fully Raised 44 80 ° Massimum Rollback Angle - Fully Raised 44 80 ° Clearance Radius - Foott with Bucket 161 20 mm Clearance Radius - Foott with Bucket 18 3246 mm Clearance Radius - Foott with Bucket 18 3246 mm Glearance Radius - Foott with Bucket 18 3246 mm Glearance Radius - Foott with Bucket 19 836 mm <			1405 mm
Articularion angle Articularion angle Verall length with bucket 116 4279 mm Overall length with bucket 116 4279 mm Overall length with bucket 112 3583 mm Rear coveraling 123 3583 mm Rear coveraling 124 3583 mm Rear coveraling 125 3583 mm Rear coveraling 126 61120 mm Dump angle - Eully Raised 127 379 mm Dump Height - Fully Raised 128 44 59 - 129 1726 mm Assimum Roiback Angle - Fully Raised 129 7.79 mm Gound clearance 120 181 322 7.79 mm Gound clearance 121 2.35 mm Rear coveraling 122 7.79 mm Gound Plane to Bucket Edge Height 129 8.35 mm Rear coveraling 120 mm Rear coveraling 121 mm Rear coveraling 122 mm Rear coveraling 123 mm Rear coveraling 124 mm Rear coveraling 125 mm Rear coveraling 126 mm Rear coveraling 127 mm Rear coveraling 128 mm Rear coveraling 129 mm Rear coveraling 120 mm Rea			
11			
Overall length - Less bucket b1 1100 mm Overall length - Less bucket b2 3583 mm Near overhang c6 1120 mm Dump pangle - Fully Passed a5 39° Dump pangle - Fully Raised h29 2126 mm Maximum Rollback Ange - Fully Raised 44 50° Oligaing Pestion h32 -79 mm Ologaing Pestion m4 320 mm Ologaing Festion h32 -79 mm Ologaing Residue - Foot with Bucket b18 3246 mm Oleanance Radius - Less bucket Edge Height b42 2655 mm Oleanance Radius - Less bucket Edge Height b42 2655 mm Tread width (wheel center) b29 336 mm Tread width (wheel center) m3 214 mm Bucket Width e1 1520 mm Tread treat to the Proper Tread m4 32.12 mm	•		
Owerall width less bucket b1 1100 mm Overall length - Less Bucket 2 3588 mm Reser overhang 66 1120 mm Dump angle - Fully taised a5 39 * Dump angle - Fully Raised h29 2125 mm Maximum Rollback Angle - Fully Raised a4 50 * Oligange Position h32 -79 mm Ground clearance m4 320 mm Clearance Radius - Front with Bucket b18 3246 mm Clearance Radius - Front with Bucket b14 2767 mm Ground Plane to Bucket Edge Height b14 2767 mm Ground Plane to Bucket Edge Height b14 2655 mm Tread width (wheel center) b29 836 mm Matchement You'ld Clearance 103 mm 163 mm Height from ground to axis center m8 214 mm 2250 mm Engine brand m8 214 mm 2250 mm 2250 mm Engine brand m8 214 mm 3 669 mm 4433 LETT 156 km / 1500 gm 3 669 mm		116	
Overall Length - Less Bucket 12 3583 mm Rear overhamp c6 1120 mm Dumm Patight - Fully Raised h29 2126 mm Dumm Patight - Fully Raised h29 2126 mm Mackimum Rollback Angle - Fully Raised h32 .79 mm Cloquard Clearance m4 320 mm Clearance Radius - Front with Bucket b18 324 mm Clearance Radius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height b14 2767 mm Ground Plane to Bucket Edge Height b14 2765 mm Tread widh (wheel center) b29 833 mm Attachment Phytot Clearance m8 214 mm Height from ground to axie center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pvot Pin m3 669 mm Biggine brand e1 1520 mm Engine model 433-1577 3 Engine power (Ho k W) 48 Hy J 36 kW Max. travel speed (my yany according to applicable regulations) 2 2 / 2 <td></td> <td></td> <td></td>			
Rear oreshang c6 1120 mm Dump angle - Fully faised a5 35 * Ump Height - Fully Raised h29 2126 mm Maximum Rollback Angle - Fully Raised a4 50 * Ligiging Position h32 .79 mm Ground clearance m4 320 mm Clearance Radius - Front with Bucket b18 3246 mm Clearance Radius - Front with Bucket b14 2767 mm Ground Plane to Bucket Edge Height b42 2655 mm Tread width (wheel center) b29 836 mm Attachment Privot Clearance m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Privot Pra m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Privot Pra m3 669 mm Brighte Brand pa 2520 mm Engine brand pa 4433 ±E77 Engine brand pa 4433 ±E77 Engine brand pa 4433 ±E77 Engine prower (by J. W)			
Dump angle - Fully raised a5 39 ° Dump Helph Fully Raised h29 2126 mm Maximum Roliback Angle - Fully Raised a4 50 ° Digging Position fb2 -79 mm Clearance Radius - Front with Bucket b18 3246 mm Clearance Radius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height h42 2855 mm Tread width (wheel center) b29 836 mm Attachment Privot Clearance m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Helight from ground to ask erenter m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Helight from ground to ask erenter m3 669 mm Helight from Ground and to ask erenter m3 669 mm Helight from Ground to ask erenter stage V 3 Rogine bound perkins 1832 mm Engine bound perkins 148			
Dump Height - Fully Raised h29 2126 mm Maximum Röllback Angle - Fully Raised a4 50° Officing Rosition h32 -79 mm Ground cleanance m4 320 mm Clearance Radius - Front with Bucket b18 3246 mm Clearance Radius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height h42 2655 mm Tread with (wheel center) b29 836 mm Attachment Provi Clearance m8 214 mm Bucket Width e1 1520 mm Height from ground to axie center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pvot Pin m3 669 mm Height from Jing Pin - Fully Raised p28 2520 mm Engline brand p8 214 mm Engline brand p8 23 mm Engline brand p8 403.4E17T Engline power (Hy ZW) 403.4E17T Engline power (Hy ZW) 48 hy 36 kW Max. Explain Edge (In power System)			
Maximum Bollback Angle - Fully Raised a4 50° Digging Position h32 7-79 mm Clearance Radius - Front with Bucket b18 320 mm Clearance Radius - Front with Bucket b18 3246 mm Clearance Radius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height h42 2655 mm Tread widh (wheel center) b29 836 mm Hattachment Plvot Clearance m8 214 mm Height from ground to axie center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Height to Hinge Pin - Fully Raised h28 2520 mm Engine broad p8 2520 mm Engine prodel Ferkins 3 Engine prodel Stage V Number of cylinders 3 3 Engine prover (Hp / kW) 48 Hp / 36 kW Number of gears (noward / reverse) 48 Hp / 36 kW Number of gears (noward / reverse) 2 / 2 Number of gears (noward / reverse)			
Digging Position			
Ground clearance m4 320 mm Clearance Redius - Front with Bucket b18 3246 mm Clearance Redius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height h42 2655 mm Tread width (wheel center) b29 836 mm Height from ground to axle center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Plvot Pin m3 669 mm Height to Hinge Pin - Fully Raised h28 2520 mm Engine Perkins 152 mm Engine model 403.4-E17T 152 mm Engine power (Hp / kW) 48 Hp / 36 kW Max. torque / Engine rotation 166 km / 1500 pm Engine power (Hp / kW) 48 Hp / 36 kW Max. torque / Engine rotation 166 km / 1500 pm Toransmission type 400 km/h Max. travel speed (may vary according to applicable regulations) 2 / 2 km/h Max. travel speed (in option) (may vary according to applicable regulations) 40 km/h Max. travel speed (in option) (may vary according to applicable regulations) 60 l/min / 207 ba	- ,		
Clearance Radius - Front with Bucket b18 3246 mm	** *		
Clearance Radius - Less bucket b14 2767 mm Ground Plane to Bucket Edge Height h42 2655 mm Tread width (wheel center) b29 836 mm Attachment Pvot Clearance 103 mm 103 mm Height from ground to axic center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Height to Hinge Pin - Fully Raised h28 2520 mm Engine Perkins 2520 mm Engine model Perkins 3 Engine pomer Stage V Number of cylinders 3 Engine power (Hp / kW) 48 Hp / 36 kW 48 Hp / 36 kW Max. torque / Engine rotation T66 Nm / 1600 rpm 160 Nm / 1600 rpm Engine cooling system Water 48 Hp / 36 kW Transmission type Hydrostatic 2 / 2 Max. tavel speed (in option) (may vary according to applicable regulations) 20 km/h Service brake Hydraulics 48 Hp/draulics Hydraulic flow proptice (Iring) 60 I/min / 207 bar			
Ground Plane to Bucket Edge Height h42 2655 mm Tread width (wheel center) b29 836 mm Attachment Plvot Clearance 103 mm Height from ground to axie center m8 214 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Height Height Heigh Edge Height h28 2520 mm Engine m3 699 mm Height Edge Height h28 2520 mm Engine h28 2520 mm Engine Brand perkins 403J±17T Engine Brand \$3 8 Engine brand \$3 403J±17T Engine brand \$3 48 Hp./ 36 kW Max. Edge of Cylinders \$3 48 Hp./ 36 kW Max. Indrue F. Engine rotation \$48 Hp./ 36 kW Max. Indrue F. Engine rotation \$48 Hp./ 36 kW Max. Indrue F. Engine rotation \$48 Hp./ 36 kW Max. Indrue F. Engine rotation \$2 / 2 Max. Indrue F. Engine rotation \$3 40 km/h Max. It			
Tread width (wheel center) b29 836 mm Attachment Privot Clearance 103 mm Blucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Height Front Whige Pin - Fully Raised b28 2520 mm Engine b28 2520 mm Engine brand Perkins 403J-E17T Engine model 403J-E17T 3 Engine power (Hp / kW) 3 34 Number of cylinders 3 3 Engine power (Hp / kW) 48 Hp / 36 kW 48 Hp / 36 kW Max. torque / Engine rotation 166 km / 1600 pm Water Engine cooling system Water Water Tonsmission type Hydrostatic Water Wax. travel speed (may vary according to applicable regulations) 2 / 2 2 / 2 Max. travel speed (in option) (may vary according to applicable regulations) 3 0 km/h 3 0 km/h Max. travel speed (in option) (may vary according to applicable regulations) 6 0 l/min / 207 bar 4 pkdraulic flum brake on front axile, acting on all wheels 4 0 0 l/min / 207 bar 6 0 l/min /			
Attachment Pivot Clearance 103 mm			
Height from ground to axle center e1 1520 mm Bucket Width e1 1520 mm Front Wheel Center to Pivot Pin m3 669 mm Height to Hinge Pin - Fully Raised h28 2520 mm Engine B Perkins Engine brand Perkins Hong the Medical Perkins Engine nomel \$1 \$3 tage V Number of cykinders 3 \$4 Engine power (Hp / k W) \$4 H p / 36 kW Max. toque / Engine rotation \$166 Nm / 1600 pm Engine cooling system Water Transmission Water Transmission type \$1,000 pm Number of gears (forward / reverse) \$2 / 2 Max. travel speed (in option) (may vary according to applicable regulations) \$30 km/h Max. travel speed (in option) (may vary according to applicable regulations) \$30 km/h Hydraulic drum brake on front axle, acting on all wheels Hydraulic drum brake on front axle, acting on all wheels Hydraulic flow - Pressure \$60 l/min / 207 bar High-Flow Option (l/min) \$60 l/min / 207 bar Hydraulic show - Pressure </td <td>. ,</td> <td>b29</td> <td></td>	. ,	b29	
Bucket Wild between the Prote Pine Bucket Wild between Front Wheel Center to Prote Pine			
Front Wheel Center to Pivot Pin m3 669 mm Height to Hinge Pin - Fully Raised h28 2520 mm Engine Engine Dende Cention Cention Engine model 403.4=17T Cention Engine norm Stage V Cention Mumber of cylinders 3 Cention 3 Cention 3 Cention 3 Cention 48 Hp / 36 kW AM AM <td></td> <td></td> <td></td>			
Height to Hinge Pin - Fully Raised			
Engine brand Engine model Engine model Engine norm Number of cylinders Engine power (Hp / kW) Max. torque / Engine rotation Engine cooling system Engine cooling system Transmission type Number of gears (forward / reverse) Number of gears (forward / reverse) Max. travel speed (may vary according to applicable regulations) Service brake Hydraulic forum type Hydraulic pump type Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Engine David Command AUS AB Hp / 36 kW AB HB /			
Engine brand Perkins Engine model 403J-E17T Engine norm Stage V Number of cylinders 38 Engine power (Hp / kW) 48 Hp / 36 kW Max. torque / Engine rotation 166 Nm / 1600 rpm Engine cooling system 70		h28	2520 mm
Engine model Engine mome Engine mome Engine mome Number of cylinders Engine power (Hp / kW) Awx. torque / Engine rotation Engine cooling system Transmission type Transmission type Number of gears (froward / reverse) Max. travel speed (may vary according to applicable regulations) Max. travel speed (in option) (may vary according to applicable regulations) Max. travel speed (in option) (may vary according to applicable regulations) Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic pump type Hydraulic pump type Hydraulic flow · Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Hydraulic oil 48 403J-E17T A 483 403 403 403 403 403 403 403 403 403 40			
Engine norm Number of cylinders Engine power (Hp / kW) Max. torque / Engine rotation 166 Nm / 1600 pm Mater Transmission Transmission type Number of gears (forward / reverse) Max. travel speed (may vary according to applicable regulations) Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic flow - Pressure Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Stage V 3 48 Hp / 36 kW 48 H	Engine brand		
Number of cylinders Engine power (Hp / kW) Max. torque / Engine rotation Engine cooling system Transmission Transmission type Musc. travel speed (may vary according to applicable regulations) Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic sum brake on front axle, acting on all wheels Hydraulic flow - Pressure Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil A 8 H P / 36 kW 4 8 Hp / 36 kW	Engine model		
Engine power (Hp / kW) Max. torque / Engine rotation Engine cooling system Transmission Transmission type Number of gears (forward / reverse) Max. travel speed (may vary according to applicable regulations) Service brake Hydraulic flow - Pressure Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil A8 Hp / 36 kW 166 Nm / 1600 rpm Water Water Hydrosulic A8 Hp / 36 kW 166 Nm / 1600 rpm Water 180 Capacities Hydraculics 180 Capacities Hydraculic oil	Engine norm		
Max. torque / Engine rotation Engine cooling system Transmission Transmission type Number of gears (forward / reverse) Max. travel speed (may vary according to applicable regulations) Service brake Hydraulic fow - Pressure Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 166 Nm / 1600 rpm Water Water Hydrosulic Number of Gear (Institute of Number of Gear pump) 60 I/min / 207 bar 60 I/min Tank capacities Hydraulic oil	Number of cylinders		3
Engine cooling system Transmission Transmission type Max. travel speed (may vary according to applicable regulations) Service brake Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Water Hydraulic of Max of the standard fraction of the	Engine power (Hp / kW)		48 Hp / 36 kW
Transmission Transmission type Hydrostatic Number of gears (forward / reverse) 2 / 2 Max. travel speed (may vary according to applicable regulations) 20 km/h Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic drum brake on front axle, acting on all wheels Hydraulic pump type Gear pump Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 48 I	Max. torque / Engine rotation		166 Nm / 1600 rpm
Transmission type Number of gears (forward / reverse) Az / 2 Max. travel speed (may vary according to applicable regulations) As whether the speed (in option) (may vary according to applicable regulations) Service brake Hydraulic drum brake on front axle, acting on all wheels Hydraulic pump type Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Hydrau	Engine cooling system		Water
Number of gears (forward / reverse) A 2 / 2 Max. travel speed (may vary according to applicable regulations) A 30 km/h Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic drum brake on front axle, acting on all wheels Hydraulic pump type Gear pump Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil A 8 I	Transmission		
Max. travel speed (may vary according to applicable regulations) 20 km/h Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic drum brake on front axle, acting on all wheels Hydraulic pump type Gear pump Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 48 I	Transmission type		Hydrostatic
Max. travel speed (in option) (may vary according to applicable regulations) Service brake Hydraulic drum brake on front axle, acting on all wheels Hydraulic pump type Gear pump Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 48 I	Number of gears (forward / reverse)		2 / 2
Hydraulic drum brake on front axle, acting on all wheels Hydraulics Hydraulic pump type Gear pump Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Hydraulic drum brake on front axle, acting on all wheels Gear pump 60 I/min / 207 bar 60 I/min / 207 bar 48 I	Max. travel speed (may vary according to applicable regulations)		20 km/h
Hydraulics Hydraulic pump type Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 48 I	Max. travel speed (in option) (may vary according to applicable regulations)		30 km/h
Hydraulics Hydraulic pump type Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil 48 I	Service brake		Hydraulic drum brake on front axle, acting on all wheels
Hydraulic pump type Hydraulic flow - Pressure High-Flow Option (I/min) Tank capacities Hydraulic oil Gear pump 60 I/min / 207 bar 60 I/min 60 I/min 48 I	Hydraulics		
Hydraulic flow - Pressure 60 I/min / 207 bar High-Flow Option (I/min) 60 I/min 60 I/min High-Flow Option (I/min) 48 I			Gear numn
Hydraulic oil 60 I/min 60 I/min 48 I			
Tank capacities Hydraulic oil 48 I			
Hydraulic oil 48 I			00 I/IIIII
			A0 I
	Fuel		35

MLA 4-50 H-C - Dimensional drawing

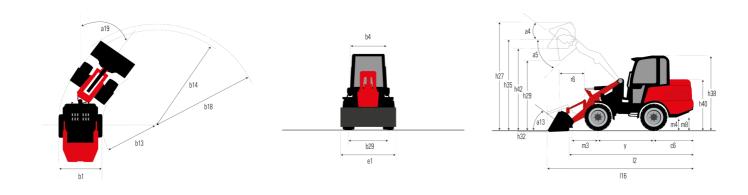





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes