Technical sheet:

# MLT 1041-145 PS+L






	MLT 1041-145 PS+L Created on December 15, 2025 at 8:04 PM
Capacities	Metric
Max. capacity	Q 4100 kg
Max. lifting height	h3 9.65 m
Maximum outreach	6.50 m
Reach at max. height	1.50 m
Breakout force with bucket	5043 daN
Weight and dimensions	
Jnladen weight (with forks)	9690 kg
Ground clearance	m4 0.43 m
Wheelbase	y 2.88 m
Overall length to carriage (with hitch)	l11 5.20 m
Overall length to carriage (without hitch)	13 5.03 m
Front overhang	1.30 m
Overall width	b1 2.39 m
Overall cab width	b4 0.99 m
Overall height	h17 2.42 m
Filt-down angle	a5 135 °
Filt-up angle	a4 12 °
External turning radius (over tyres)	Wa1 3.74 m
Standard tires	Michelin - XMCL - 460/70 R24 159A8
Orive wheels (front / rear)	2/2
Steering mode	Manicrab, 2 wheel steer, 4 wheel steer, Crab mo
rame leveling corrector	a9 7°
Performances	
ifting	6.60 s
owering	4.70 s
extension	9.50 s
Retraction	6.90 s
Crowd	3.70 s
Oump	2.80 s
Engine	
Engine brand	Yanmar
Engine norm	Stage V / Tier 4 Final
Engine model	4TN107FHT-5SMUF
Number of cylinders - Capacity of cylinders	4 - 4567 cm³
Engine power (Hp / kW)	141 Hp / 105 kW
Max. torque / Engine rotation	602 Nm @1500 rpm
Drawbar pull (Laden)	9130 daN
Reversible fan	
Reversible (all	Standard
Engine cooling system	4 radiators (water + intercooler + hydraulic oil transmission oil)
Transmission Transmission	
Fransmission type	Torque converter with powershift gearbox
Searbox	M-Shift
lumber of gears (forward / reverse)	5/3
Max. travel speed (may vary according to applicable regulations)	40 km/h
Differential lock	Limited slip differential on front and rear axle
Parking brake	Automatic negative parking brake
Service brake	Oil-immersed multi-discs braking on front & re
	axles
lydraulics	
lydraulic pump type	Variable displacement pump
lydraulic flow - Pressure	200 l/min - 270 bar
low sharing distributor	Standard
ank capacities	
lydraulic tank capacity	141
uel	142 l
Diesel Exhaust fluid (AdBlue® type)	21.50
loise and vibration	
Noise at driving position (LpA) tested following NF EN 12053 norm	69 dB
Noise to environment (LwA)	105 dB
Vibration on hands/arms	2.50 m/s²
Miscellaneous	
	Tractor homologation
ractor nomologation	Tracks no no organism
Tractor homologation Cab certification	Cabin ROPS - FOPS level 2

## **Optional tires tab**


	Overall height	Overall width
ALLIANCE - A580 - 460/70 R24 159A8	2.53 m	2.38 m
ALLIANCE - A585 - 460/70 R24 159A8	2.53 m	2.39 m
MICHELIN - BIBLOAD - 460/70 R24 159A8	2.52 m	2.39 m
MICHELIN - BIBLOAD - 500/70 R24 164A8	2.56 m	2.42 m
MICHELIN - XMCL - 460/70 R24 159A8	2.53 m	2.39 m
MICHELIN - XMCL - 500/70 R24 164A8	2.55 m	2.43 m
TRELLEBORG - TH400 - 460/70 R24 159A8	2.52 m	2.39 m
TRELLEBORG - TH400 - 500/70 R24 164A8	2.55 m	5.42 m
TRELLEBORG - TH500 - 460/70 R24 159A8	2.53 m	2.41 m
VREDESTEIN - ENDURION - 460/70 R24 159A8	2.54 m	2.40 m
VREDESTEIN - ENDURION - 500/70 R24 164A8	2.56 m	2.44 m

### MLT 1041-145 PS+L - Dimensional drawing

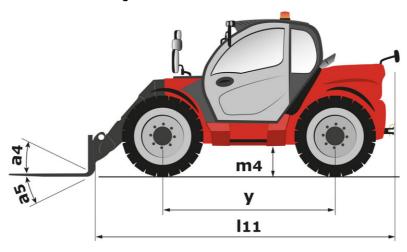


#### MLT 1041-145 PS+L - Load chart

#### Machine on tires with forks Metric

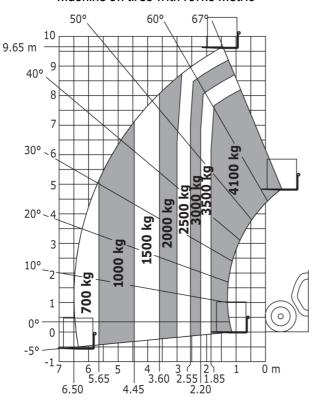

#### Machine on tires with forks LC 600 mm Metric

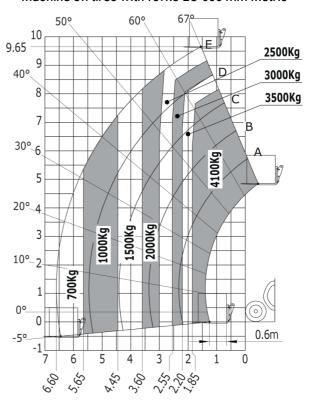





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes