Technical sheet:

MLT 961-160 V+ L






MLT 961-160 V+ L Created on October 21, 2025 at 8:22 PM
Imperial
Q 13228 lb
h3 29 ft 6 in
17 ft 5 in
3 ft 7 in
7300 daN
7000 ddii
26345 lb
m4 1 ft 6 in
y 9 ft 10 in 111 20 ft
5 ft 5 in
b1 8 ft 2 in
b4 3 ft 3 in
h17 8 ft 4 in
a5 135 °
a4 12°
Wa1 14 ft 1 in
Alliance - A580 - 500/70 R24 164A8
2/2
2/2
a9 7°
,
8.50 s
6.50 s
7 s
6 s
3.80 s
3.60 s
Yanmar
Stage V / Tier 4 Final
4TN107FTT-5SMUF
4 - 279 in ³
156 Hp / 115 kW
594 ft/lbs @1350 rpm
9700 daN
Standard
3 radiators water + intercooler + transmission
C Idulator Hater - Interested - Idulatoris
M-Vario Plus
25 mph
Automatic negative parking brake
Oil-immersed multi-discs braking on front & axles
axics
Vadable displacer of com-
Variable displacement pump
53 US gpm - 3916 PSI
Standard
48 US gal
38 US gal
6 US gal
69 dB
69 dB 105 dB
105 dB
105 dB < 8 ft/s²
105 dB < 8 ft/s² Tractor homologation
105 dB < 8 ft/s²

Optional tires tab


	Overall height	Overall width
ALLIANCE - EM L-3/E3 - 17.5 R25		-
MICHELIN - BIBLOAD - 500/70 R24 164A8		-
MICHELIN - XHA - 17.5 R25	-	-
MICHELIN - XMCL - 500/70 R24 164A8		-
MITAS - EM60 - 17.5 R25	-	-
NOKIAN - TRI STEEL - 500/70 R24 164A8		-
SOLIDEAL - SOLIDAIR TLH - 14.00 R24	-	-
TRELLEBORG - TH400 - 500/70 R24 164A8		-
VREDESTEIN - ENDURION - 500/70 R24 164A8		-

MLT 961-160 V+ L - Dimensional drawing

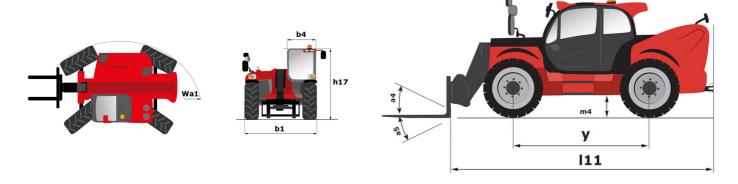

MLT 961-160 V+ L - Load chart

Machine on tires with forks Imperial

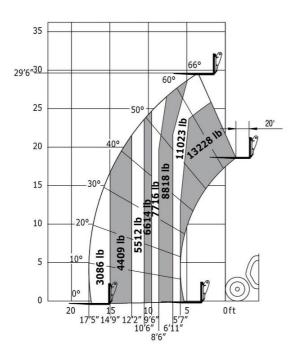





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes