Technical sheet:

MLT-X 1041-145 PS+L






	MLT-X 1041-145 PS+L Crea	ted on December 14, 2025 at 4:19 PM UTC
Capacities		Metric
Max. capacity	Q	4100 kg
Max. lifting height	h3	9.65 m
Maximum outreach		6.50 m
Reach at max. height		1.50 m
Breakout force with bucket		5043 daN
Weight and dimensions		JUHJ GAN
Unladen weight (with forks)		9690 kg
Ground clearance	m4	0.43 m
Wheelbase	у	2.88 m
Overall length to carriage (with hitch)	JI11	5.20 m
Overall length to carriage (without hitch)	13	5.03 m
Front overhang	10	1.30 m
Overall width	b1	2.39 m
Overall cab width	b4	0.99 m
Overall height	h17	2.42 m
Tilt-down angle	a5	135 °
Tilt-up angle	a4	12 °
External turning radius (over tyres)	Wa1	3.74 m
Standard tires	Wal	Michelin - XMCL - 460/70 R24 159A8
Drive wheels (front / rear)		2 / 2 Manierah 2 wheel steer 4 wheel steer Crah mode
Steering mode	-0	Manicrab, 2 wheel steer, 4 wheel steer, Crab mode
Frame leveling corrector Performances	a9	7°
		6.60 s
Lifting		
Lowering		4.70 s
Extension		9.50 s
Retraction		6.90 s
Crowd		3.70 s
Dump		2.80 s
Engine Engine brand		Yanmar
Engine norm		Stage IIIA
Max. fuel sulphur content		1000 ppm
		4TN107HT-5SMUF
Engine model		4 - 4567 cm ³
Number of cylinders - Capacity of cylinders		
Engine power (Hp / kW)		141 Hp / 105 kW
Max. torque / Engine rotation Drawbar pull (Laden)		602 Nm @1500 rpm 9130 daN
Reversible fan		Standard
Reversible fall		4 radiators (water + intercooler + hydraulic oil +
Engine cooling system		transmission oil)
Transmission		
Transmission type		Torque converter with powershift gearbox
Gearbox		M-Shift
Number of gears (forward / reverse)		5/3
Max. travel speed (may vary according to applicable regulations)		40 km/h
Differential lock		Limited slip differential on front and rear axles
Parking brake		Automatic negative parking brake
Service brake		Oil-immersed multi-discs braking on front & rear
		axles
Hydraulics		Variable displacement numn
Hydraulic flow - Proceure		Variable displacement pump 200 I/min - 270 bar
Hydraulic flow - Pressure		
Flow sharing distributor Tank capacities		Standard
Hydraulic tank capacity		141
Fuel		1411
Noise and vibration		1 4
		69 dB
Noise at driving position (LpA) tested following NF EN 12053 norm		
Noise to environment (LwA)		105 dB
Vibration on hands/arms		2.50 m/s²
Miscellaneous Tractor homologation		Tractor homologation
Tractor homologation Cab certification		Tractor homologation Cabin ROPS - FOPS level 2
Controls		JSM

Optional tires tab




MLT-X 1041-145 PS+L - Dimensional drawing

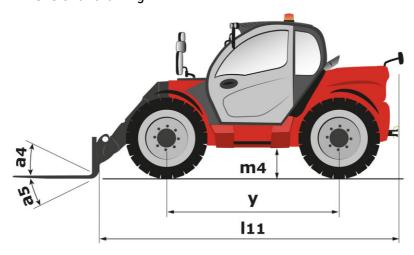

MLT-X 1041-145 PS+L - Load chart

Machine on tires with forks Metric

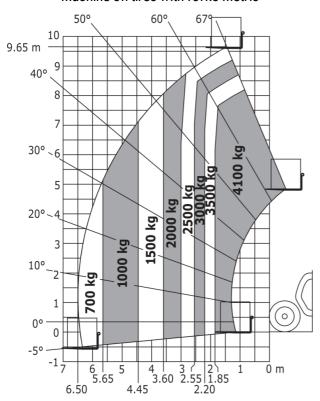





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes