Technical sheet:

MLT-X 961-160 V+ L






Max. casarsiny		MLT-X 961-160 V+ L Create	d on December 14, 2025 at 12:11 AM UT
Max. Himp deplot with missions or probability of the control of the contr	Capacities		Metric
Max. Miny parkgrish Maximum parkgrish	Max. capacity	Q	6000 kg
Manimum (processes)			
Seach of two whoches			
Deskboot floor with backet Workplant and dimmarked Workplant and floor with floor floor (A) for (A) floor (A)			
Work Indemination Month Indication weight (in finits) In 1980 kg 1980 kg 1980 kg 1980 kg 1980 kg 3 mm 4 mm 5 mm 3 mm 5 mm 1 mm 6 mm 7 m			
1350 kg 1350			
Count of Counter Count			11050 kg
Wisebbase y 3 m Oweall length to carinage (with thich) 31 6.50 m Oweall length to carinage (with thich) 31 6.57 m Oweall sched 51 2.59 m Oweall sched 51 2.48 m Oweall sched 51 2.48 m Oweall sched 51 2.55 m Weall sched 51 2.55 m Williams 35 3135** Williams 44 12** Williams 44 12** Williams 43 m 35 m Williams 40 m 32** Williams 40 m 32** Williams 40 m 30 m Williams 30 m 30 m Williams 40 m 30 m Williams 40 m 30 m Williams 40 m 30 m		m4	*
11			
1.5 1.5			
1.5.5 m 1.5.			
December		13	
Devail be both Deva			
Devail height 137			
Till down anging	Overall cab width		0.99 m
Time panging	Overall height	h17	2.55 m
External tuming addits (vert yees)	Tilt-down angle	a5	135 °
Alliance - AS80 - S00/70 Red 1 EAAB	Tilt-up angle	a4	12 °
2 / 2 2 2 2 2 2 2 2 2	External turning radius (over tyres)	Wa1	4.30 m
2	Standard tires		Alliance - A580 - 500/70 R24 164A8
Seeing mode	Drive wheels (front / rear)		
Fame Investing connector 89 7			Manicrab. 2 wheel steer. 4 wheel steer. Crab mode
Description		a9	
1.50 to 1.50		<u></u>	
Comering 6.50 s Cethersion 7 s Februation 6 s Crowd 3.80 s Dump 3.60 s Engline 7 s Engline Plant 7 s Engli			9 50 c
Extension 7 s Retraction 6 s Crowd 3.80 s Dump 3.60 s Engine			
Retraction 6 s Crowd 3.80 s Dump 3.60 s Engine			
Crowd 3.80 s 3.00 s 5.00 mm 3.00 s 5.00 mm			
Dump 3.60 s Engine Company Engine Pand Yanmar Engine norm Stage IIIA Max. Fuel suiphur content 1000 ppm Engine model 4TNITOTTSSMUF Number of cylinders - Capacity of cylinders 4 - 4.567 cm² Engine power (Hp / kW) 360 Nm gl 350 mp Max. Lorque / Engine rotation 805 Nm gl 350 mp Drawbar pull (Laden) 9700 dalx Reversible fan 5 Standard Engine cooling system 3 radiators water + intercooler + transmission oil Tonsmission bye M-Vario Plus Max. travel speed (may vary according to applicable regulations) M-Vario Plus Parking brake Oli-Immersed multi-discs braking on front & rear arises Service brake Oli-Immersed multi-discs braking on front & rear arises Automatic negative parking brake Service brake Variable displacement pump Hydraulic pump type Variable displacement pump Hydraulic now Pressure Standard Standard Tourist capacities Standard 101 Teles Flow sharing distributor 200 I/min - 270 bar <th< td=""><td></td><td></td><td></td></th<>			
Engine band Engine norm Stage IIIA Max. Ideal Sulphur content Engine nordel Max. Ideal Sulphur content Engine nordel Engine nordel ATHIOTETSSMIF Engine power (Hp / kW) Aux. torque / Engine rotation Toraver pull (Laden) Power of Hp / 1 kW) Aux. torque / Engine rotation Toraver pull (Laden) Power of Hp / 1 kW) Aux. torque / Engine rotation Toraver pull (Laden) Power of Hp / 1 kW) Aux. torque / Engine rotation Toraver pull (Laden) Power of Hp / 1 kW) Aux. torque / Engine rotation Transmission Transmission Transmission Transmission type Aux. travel speed (may vary according to applicable regulations) Parking brake Service brake Pull Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axies Service brake Pull Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axies Flow sharing distributor Trank capacities Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Fuel Hydraulic tank capacity Fuel Fuel Fuel Fuel Fuel Fuel Fuel Fuel			
Engine brand Yanmar Engine nom Stage IIIA Max. (sel subphur-content 1000 ppm Engine model 4TN107TT-SSMUF Number of cylinders - Capacity of cylinders 4 - 4557 cm² Engine power (Hp / kW) 156 Hp / 115 kW Max. torque / Engine rotation 805 Nm @1350 rpm Drawbar pull (Laden) 9700 dan Reversible fan 3 radiators water + intercooler + transmission oil Engine cooling system 3 radiators water + intercooler + transmission oil Transmission tye M-Vario Plus Max. vavel speed (may vary according to applicable regulations) 40 km/h Parking brake 01-il-mersed multi-discs braking on front & rear axies Service brake 10-il-mersed multi-discs braking on front & rear axies Hydraulic pump type Variable displacement pump Hydraulic flow - Pressure 200 l/min - 270 bar Flow sharing distributor 180 I Table 180 I Full 418 0 I Variable displacement pump 42 I Hydraulic lank capacity 180 I Full 69 dB			3.60 s
Engine nom Stage IIIA Max. Ivel sulphur content 1000 ppm Engine mode 4.10717TSSMUF Number of cylinders - Capacity of cylinders 4.4567 cm³ Engine power (Hp / kW) 155 Hp / 115 kW Max. torque / Engine rotation 805 Nm @1350 rpm Drawbar pull (Laden) 9700 dan Reversible fan 3 radiators water intercooler + transmission oil Engine ecoling system 3 radiators water intercooler + transmission oil Transmission type M-Vario Plus Max. travel speed (may vary according to applicable regulations) My Automatic negative parking brake Service brake 0H-minersed multi-discs braking on front & rear axles Hydraulic bump type Variable displacement pump Hydraulic pump type You knight of the company of th	Engine		
Max. fuel sulphur content 1000 ppm Engine model 4TN107TTSSMUF Number of cylinders - Capacity of cylinders 4 - 4567 cm² Engine power (Hp / kW) 156 Hp / 115 kW Max. Torque / Engine rotation 805 hm @1350 pm Drewbar pull (Laden) 9700 dan Reversible fan Standard Engine cooling system 3 radiators water + intercocler + transmission oil Transmission type M-Vario Plus Max. tavel speed (may vary according to applicable regulations) 40 km/h Parking brake Oil-immersed multi-discs braking on front & rear axies Service brake Oil-immersed multi-discs braking on front & rear axies Service brake Oil-immersed multi-discs braking on front & rear axies Service brake Oil-immersed multi-discs braking on front & rear axies Service brake Oil-immersed multi-discs braking on front & rear axies Service brake Postation of the properties of the prope	Engine brand		Yanmar
Engine model 4 TN107TT-SSMUF Number of cylinders - Capacity of cylinders 4 - 4.567 cm³ Engine power (Hp / kW) 156 Hp / 115 kW Max. torque / Engine rotation 805 Nm @1350 rpm Drawbar pull (Lader) 9700 daN Reversible fan 3 radiators water + intercooler + transmission of the standard Engine cooling system 3 radiators water + intercooler + transmission of transmission type Transmission Type M-Vario Plus Max. travel speed (may vay according to applicable regulations) Automatic negative parking brake Service brake Oll-immersed multi-discs braking on front & rear axles Hydraulic (burn) by Pe Variable displacement pump Hydraulic pump by Pe Variable displacement pump Hydraulic shak capacites 200 //min - 270 bar Flow sharing distributor 200 //min - 270 bar Tank capacites 180 I Fuel 142 I Noise and wibation 69 dB Noise at driving position (LpA) tested following NF EN 12053 norm 69 dB Noise to environment (LwA) 105 dB Wibration on hands/arms 2.50 m/s² Miscellane	Engine norm		Stage IIIA
Number of cylinders - Capacity of cylinders Engine power (Hp / kW) Aux. torque / Engine rotation Box borney / Engine power (Hp / kW) Aux. torque / Engine rotation Box borney / Engine / Engine rotation Box borney / Engine rotation / Eng	Max. fuel sulphur content		1000 ppm
Engine power (Hp / kW) 156 Hp / 115 kW Max. torque / Engine rotation 805 km @1350 rpm Drawbar pull (Laden) 9700 dah Reversible fan Standard Engine cooling system 3 radiators water + intercooler + transmission oul Transmission M-Vario Plus Max. travel speed (may vary according to applicable regulations) 40 km /h Parking brake Automatic negative parking brake Service brake 01-immersed multi-discs braking on front & rear axies Hydraulics Variable displacement pump Hydraulic pump type Variable displacement pump Hydraulic flow - Pressure 2001 /rmin - 270 bar Flow sharing distributor Standard Tank capacities 180 l Fuel 180 l Noise and vibration 180 l Noise and vibration 69 dB Noise to environment (LwA) 105 dB Vibration on hands/arms 2.50 m/s² Miscellar homologation Tractor homologation Cabin ROPS - FOPS level 2 Cabin ROPS - FOPS level 2	Engine model		4TN107TT-5SMUF
Max. torque / Engine rotation 805 Nm @1350 pm Drawbar pull (Laden) 9700 daN Reversible fan 3 radiators water intercooler + transmission oil of transmission type Adjators water + intercooler + transmission oil of transmission type Max. travel speed (may vary according to applicable regulations) AUtomatic negative parking brake Parking brake Oil-immersed multi-discs braking on front & rear axles Service brake Oil-immersed multi-discs braking on front & rear axles Hydraulic pump type Variable displacement pump Hydraulic flow - Pressure 200 l/min - 270 bar Flow sharing distributor Standard Tank capacities 180 l Hydraulic tank capacity 180 l Fuel 142 l Noise and divitation 69 dB Noise and wibstion 69 dB Noise on environment (LwA) 105 dB Wibscale neous 105 dB Tractor homologation Tractor homologation Cabin ROPS - FOPS level 2	Number of cylinders - Capacity of cylinders		4 - 4567 cm³
Drawbar pull (Laden) Reversible fan Engine cooling system Transmission type Max. travel speed (may vary according to applicable regulations) Parking brake Service brake Rydraulics Hydraulic pump type Hydraulic pump type Hydraulic low - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Tink capacities Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Wibardan (LyA) tested following NF EN 12053 norm Noise to environment (LwA) Tractor homologation Cab certification Cab certification Tractor homologation Cab certification Tractor homologation Cab in ROPS - FOPS level 2	Engine power (Hp / kW)		156 Hp / 115 kW
Drawbar pull (Laden) Reversible fan Engine cooling system Transmission type Max. travel speed (may vary according to applicable regulations) Parking brake Service brake Rydraulics Hydraulic pump type Hydraulic pump type Hydraulic low - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Tink capacities Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Wibardan (LyA) tested following NF EN 12053 norm Noise to environment (LwA) Tractor homologation Cab certification Cab certification Tractor homologation Cab certification Tractor homologation Cab in ROPS - FOPS level 2	Max. torque / Engine rotation		805 Nm @1350 rpm
Reversible fan Standard Engine cooling system 3 radiators water + intercooler + transmission oil Transmission type Max. travel speed (may vary according to applicable regulations) Parking brake Service brake Hydraulics Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fluel Noise and driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Wibration on hands/arms Tractor homologation Cab certification Cab certification Tractor homologation Cab certification A Waria Del standard A Waria Delus Adadous A Waria Delus Adadous A Waria Delus Ada (may have been a fine particular of tractor homologation Cab certification Tractor homologation Cab certification			
Engine cooling system Transmission type Max. travel speed (may vary according to applicable regulations) Max. travel speed (may vary according to applicable regulations) Automatic negative parking brake Service brake Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic stank capacity Fiel Noise and driving position (LpA) tested following NF EN 12053 norm Noise et driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Tractor homologation Cab certification Cab certification Cab certification Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Hydraulic pump type Variable displacement pump Variable displacement pump Automatic negative parking on front & rear axles Variable displacement pump 1 Variable displacement pump 2 200 l/min - 270 bar Standard 1 142 l 1 142 l 1 142 l 1 155 dB 2 1.50 m/s² Tractor homologation Cabi nROPS - FOPS level 2			
Transmission M-Vario Plus Max. tavel speed (may vary according to applicable regulations) Automatic negative parking brake Parking brake Oil-immersed multi-disces braking on front & rear axiles Hydraulics Variable displacement pump Hydraulic pump type Variable displacement pump Hydraulic flow - Pressure 2001/min - 270 bar Flow sharing distributor Standard Tank capacities 180 I Hydraulic tank capacity 180 I Fuel 142 I Noise and vibration 69 dB Noise to environment (LwA) 69 dB Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Tractor homologation Tractor homologation Cabin ROPS - FOPS level 2			
Transmission type Max. travel speed (may vary according to applicable regulations) Parking brake Service brake Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Trank capacities Hydraulic tank capacities Hydraulic shark capacities Hydrauli			3 ladiators water - intercooler - transmission on
Max. travel speed (may vary according to applicable regulations) Parking brake Service brake Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Hiscellaneous Tractor homologation Cab certification 40 km/h Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Avaries Automatic negative parking brake Variable displacement pump Avaries Automatic negative parking brake Automatic negative pa			M Verie Plue
Parking brake Service brake Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Automatic negative parking brake Oil-immersed multi-discs braking brake Oil-immersed multi-discs braking brake axles Variable displacement pump Variable displacement pump 200 1/min - 270 bar Standard 180 1 180 1 142 1 142 1 169 dB 105 dB 105 dB 105 dB Tractor homologation Cab in ROPS - FOPS level 2	··		
Service brake Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Oil-immersed multi-discs braking on front & rear axles Variable displacement pump Variable displacement pump Page 200 l/min - 270 bar Standard Tank capacities 180 l 180 l 142 l 105 dB 105 dB 105 dB 115 dB 11			
Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Avaiable displacement pump Variable displacement pump Avaible di	Parking brake		
Hydraulics Hydraulic pump type Hydraulic flow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Variable displacement pump Avaible dis	Service brake		
Hydraulic pump type Hydraulic plow - Pressure Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Variable displacement pump 200 l/min - 270 bar Standard Standard Standard 180 l 180 l 142 l 142 l 195 dB 105 dB 105 dB Tractor homologation Cab certification Cab in ROPS - FOPS level 2			axies
Hydraulic flow - Pressure 200 l/min - 270 bar Flow sharing distributor Standard Tank capacities Use the capacity Hydraulic tank capacity 180 l Fuel 142 l Noise and vibration Use to environment (LpA) tested following NF EN 12053 norm 69 dB Noise to environment (LwA) 105 dB Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2			Variable dianter and account
Flow sharing distributor Tank capacities Hydraulic tank capacity Fuel Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm Noise to environment (LwA) Vibration on hands/arms Miscellaneous Tractor homologation Cab certification Standard 180 I 180 I 180 I 180 I 190 I 1			
Tank capacities 180 I Hydraulic tank capacity 180 I Fuel 142 I Noise and vibration State of the viring position (LpA) tested following NF EN 12053 norm 69 dB Noise at driving position (LpA) 105 dB Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2			
Hydraulic tank capacity 180 I Fuel 142 I Noise and vibration State of the state of following NF EN 12053 norm 69 dB Noise at driving position (LpA) tested following NF EN 12053 norm 69 dB Noise to environment (LwA) 105 dB Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2	•		Standard
Fuel 142 I Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm 69 dB Noise to environment (LwA) Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2			
Noise and vibration Noise at driving position (LpA) tested following NF EN 12053 norm 69 dB Noise to environment (LwA) 105 dB Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabi ROPS - FOPS level 2	Hydraulic tank capacity		
Noise at driving position (LpA) tested following NF EN 12053 norm 69 dB 105 dB 105 dB 2.50 m/s² Miscellaneous Tractor homologation Cab certification 69 dB 105 dB 10	Fuel		142 l
Noise to environment (LwA) 105 dB 2.50 m/s² Miscellaneous Tractor homologation Cab certification 105 dB 2.50 m/s² Tractor homologation Cabin ROPS - FOPS level 2	Noise and vibration		
Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2	Noise at driving position (LpA) tested following NF EN 12053 norm		69 dB
Vibration on hands/arms 2.50 m/s² Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2	Noise to environment (LwA)		105 dB
Miscellaneous Tractor homologation Cab certification Cabin ROPS - FOPS level 2	Vibration on hands/arms		
Tractor homologation Tractor homologation Cab certification Cabin ROPS - FOPS level 2			
Cab certification Cabin ROPS - FOPS level 2			Tractor homologation
COMPOS	Controls		JSM

Optional tires tab


	Overall height	Overall widt
ALLIANCE - A580 - 500/70 R24	-	-
ALLIANCE - EM L-3/E3 - 17.5 R25		-
MICHELIN - BIBLOAD - 500/70 R24 164A8	-	
MICHELIN - XHA - 17.5 R25		-
MICHELIN - XMCL - 500/70 R24 164A8	-	
MITAS - EM60 - 17.5 R25		-
NOKIAN - TRI STEEL - 500/70 R24 164A8	-	
SOLIDEAL - SOLIDAIR TLH - 14.00 R24		-
TRELLEBORG - TH400 - 500/70 R24 164A8		-
VREDESTEIN - ENDURION - 500/70 R24 164A8		-

MLT-X 961-160 V+ L - Dimensional drawing

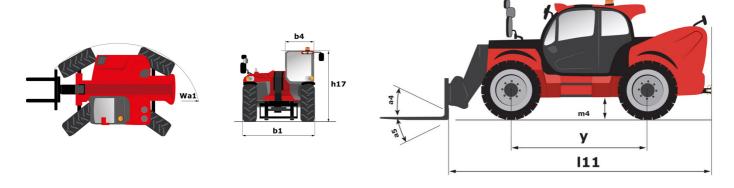

MLT-X 961-160 V+ L - Load chart

Machine on tires with forks Metric

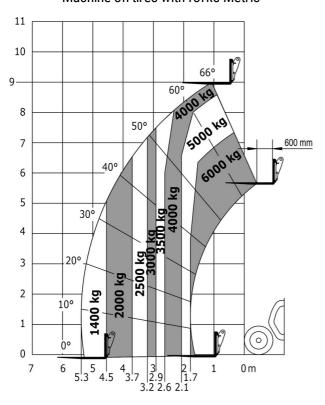





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes