

Scheda tecnica :

# MRT 1645 75


**VISION**



 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                                  |           | Metrico                                                |
|---------------------------------------------|-----------|--------------------------------------------------------|
| Max. capacity                               |           | 4500 kg                                                |
| Max. lifting height                         |           | 15.80 m                                                |
| Max. outreach                               |           | 13.50 m                                                |
| Weight and dimensions                       |           |                                                        |
| Overall length (with forks)                 | l1        | 7.58 m                                                 |
| Length to face of forks                     | l2        | 6.38 m                                                 |
| Overall width                               | b1        | 2.42 m                                                 |
| Overall height                              | h17       | 3.04 m                                                 |
| Overall cab width                           | b4        | 0.96 m                                                 |
| Ground clearance                            | m4        | 0.37 m                                                 |
| Wheelbase                                   | y         | 2.43 m                                                 |
| Tilt-up angle                               | a4        | 12 °                                                   |
| Tilt-down angle                             | a5        | 105 °                                                  |
| Turret rotation                             |           | 400 °                                                  |
| Overall weight                              |           | 13305 kg                                               |
| Forks length / width / section              | l / e / s | 1200 mm x 125 mm x 50 mm                               |
| Wheels                                      |           |                                                        |
| Standard tires                              |           | 405/70-20                                              |
| Drive wheels (front / rear)                 |           | 2 / 2                                                  |
| Steering mode                               |           | 2 wheel steer, 4 wheel steer, Crab mode                |
| Stabilisers                                 |           |                                                        |
| Stabs Type                                  |           | Wing Type                                              |
| Controls with stabs                         |           | Stabs Commands Individual or Simultaneous              |
| Engine                                      |           |                                                        |
| Engine brand                                |           | Deutz                                                  |
| Engine norm                                 |           | Stage V / Tier 4                                       |
| Engine model                                |           | TCD 3.6 L4                                             |
| I.C. Engine power rating / Power            |           | 75 Hp / 55.40 kW                                       |
| Max. torque / Engine rotation (min)         |           | 405 Nm @ 1300 rpm                                      |
| Number of cylinders - Capacity of cylinders |           | 4 - 3620 cm³                                           |
| Engine cooling system                       |           | Water cooled                                           |
| Electric circuit                            |           |                                                        |
| Number of batteries / Battery voltage       |           | 2 x 12 V                                               |
| 12V Battery capacity                        |           | 120 Ah                                                 |
| Battery starting current                    |           | (EN)850 A                                              |
| Transmission                                |           |                                                        |
| Transmission type                           |           | Hydrostatic                                            |
| Number of gears (forward / reverse)         |           | 2 / 2                                                  |
| Max. travel speed                           |           | 25 km/h                                                |
| Drawbar pull                                |           | 9400 daN                                               |
| Parking brake                               |           | Automatic negative parking brake                       |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Performances                                |           |                                                        |
| Gradeability (laden / unladen)              |           | 44.50 % / 44.50 %                                      |
| Hydraulics                                  |           |                                                        |
| Hydraulic pump type                         |           | Variable displacement pump                             |
| Hydraulic flow                              |           | 116 l/min                                              |
| Hydraulic Pressure                          |           | 275 bar                                                |
| Tank capacities                             |           |                                                        |
| Engine oil                                  |           | 11 l                                                   |
| Hydraulic oil                               |           | 144 l                                                  |
| Fuel tank                                   |           | 130 l                                                  |
| Noise and vibration                         |           |                                                        |
| Noise at driving position (LpA)             |           | 68 dB                                                  |
| Noise to environment (LwA)                  |           | 106 dB                                                 |
| Vibration to whole hand/arm                 |           | < 2.50 m/s²                                            |
| Miscellaneous                               |           |                                                        |
| Steering wheels (front / rear)              |           | 2 / 2                                                  |
| Controls                                    |           | 2 Joysticks                                            |
| Safety cab homologation                     |           | ROPS - FOPS level 2 cab                                |
| Attachment recognition system (E-Reco)      |           | Standard                                               |

MRT 1645 75 - Disegno quotato


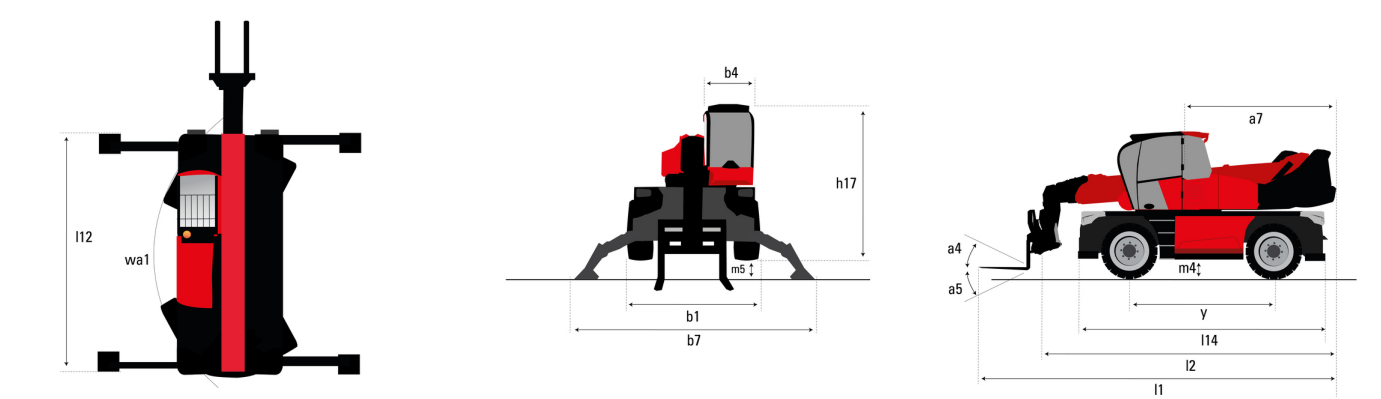


| Altri dati                                        |       | Metrico |        |
|---------------------------------------------------|-------|---------|--------|
| Length of frame                                   | $l14$ |         | 4.67 m |
| Wheelbase                                         | $y$   |         | 2.43 m |
| Ground clearance                                  | $m4$  |         | 0.37 m |
| Counterweight offset (turret at 90°)              | $a7$  |         | 2.50 m |
| Tilt-up angle                                     | $a4$  |         | 12 °   |
| Tilt-down angle                                   | $a5$  |         | 105 °  |
| Overall length at stabilisers                     | $l12$ |         | 4.41 m |
| External turning radius (over tyres)              | $Wa1$ |         | 3.92 m |
| Overall width with stabilisers extended           | $b7$  |         | 4.01 m |
| Overall height                                    | $h17$ |         | 3.04 m |
| Ground clearance under front tires on stabilizers | $m5$  |         | 0.18 m |


MRT 1645 75 - Diagramma di carico

Machine on tyres with forks Metric


Machine on lowered stabilisers with forks Metric

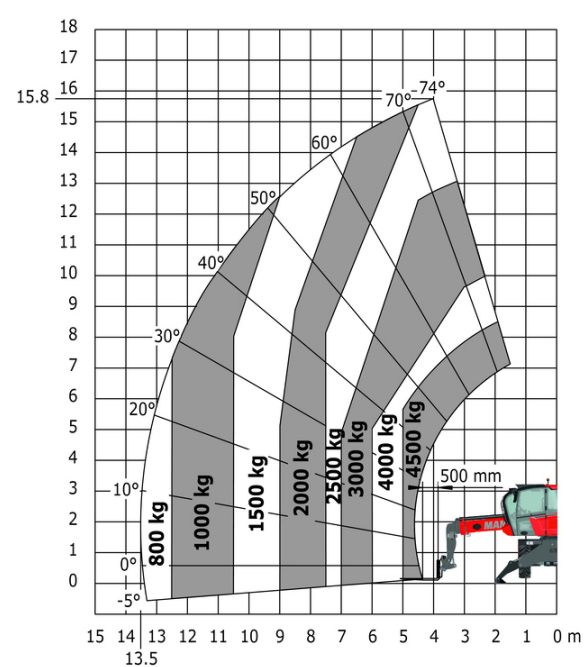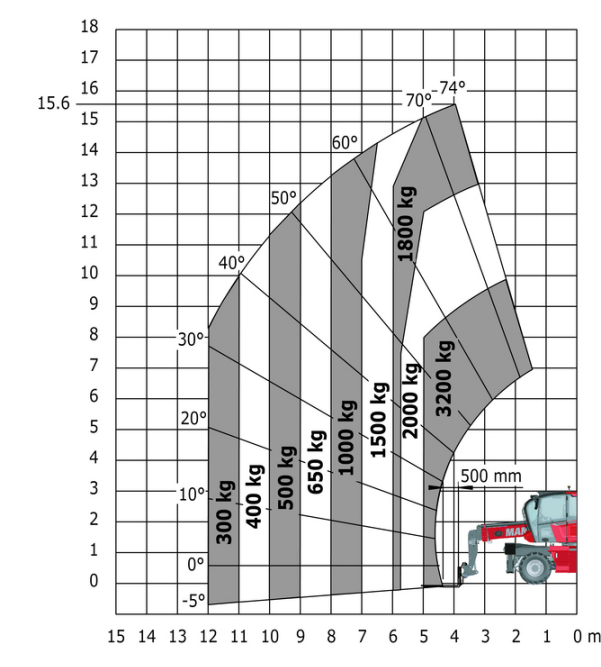


Machine on lowered stabilisers with winch 5000 kg Metric

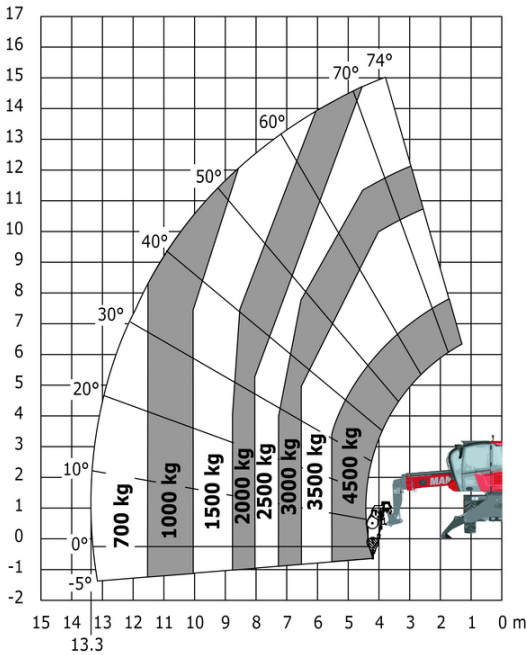


Machine on lowered stabilisers with 4000 kg jib (Metric)

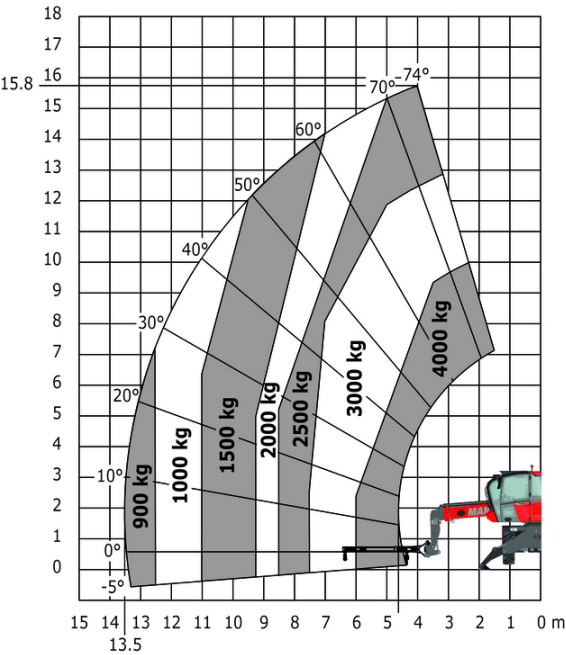



Machine on lowered stabilisers with 1500 kg jib with winch (Metric)

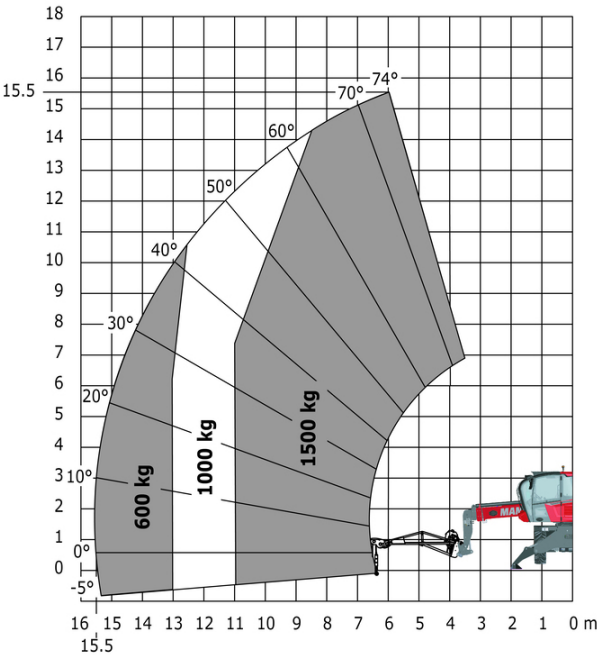

Machine on lowered stabilisers with hook 5000 kg (Metric)

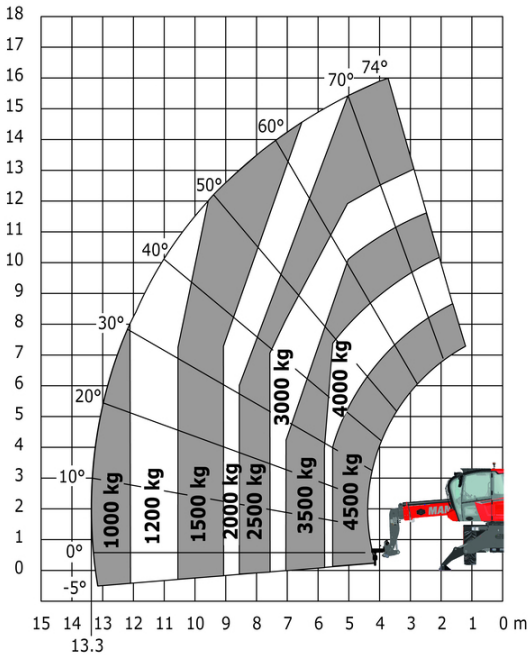

Machine on lowered stabilisers with 365 kg platform Metric Machine on lowered stabilisers with 1000 kg platform Metric

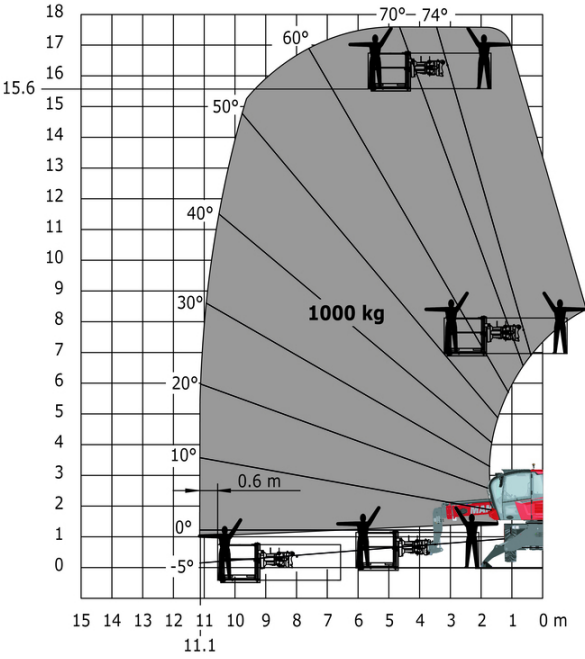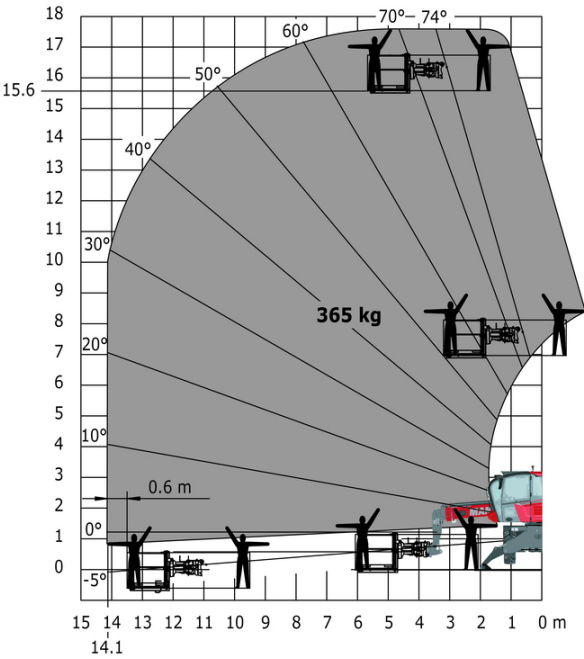



**Sede centrale**

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

[www.manitou.com](http://www.manitou.com)



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes