Technical sheet :

MXT 1740 P







	MXT 1740 P Created on	June 16, 2025 at 1:32 AM UT
Capacities		Metric
Max. capacity		4000 kg
Max. lifting height		17.40 m
Maximum outreach		13.48 m
Veight and dimensions		10.40 m
)verall length to carriage	111	6.20 m
Dverall width	b1	2.38 m
)verall height	h17	2.59 m
Vheelbase	y	2.90 m
Sround clearance	y m4	380 mm
Diverall cab width	b4	0.78 m
xternal turning radius (over tyres)	Wa1	4.05 m
	Wa I	4.05 m 11235 kg
Inladen weight (with forks)		•
Dverall weight		11235 kg
orks length / width / section	l/e/s 12	200 mm x 125 mm x 50 mm
Performances		
ifting		13.60 s
owering		9.40 s
xtension		25 s
letraction		14.10 s
Crowd		4.10 s
lump		3.20 s
ingine		
Ingine brand		Perkins
Ingine norm		Stage IIIA
ingine model		1104D-44T EPA
lumber of cylinders / Capacity of cylinders		4 - 4.40 I
C. Engine power rating - Power		92 Hp / 70 kW
/lax. torque		392 Nm
ransmission		
ransmission type	Torque c	onverter with manual transmission
lumber of gears (forward / reverse)		4 / 4
lax. travel speed		28 km/h
lax. travel speed (may vary according to applicable regulations)		28 km/h
Parking brake		Manual
Service brake	Oil-immers	ed multi-discs braking on front & rear axles
lydraulics		
łydraulic pump type		Gear pump
Hydraulic flow / Pressure		96.70 l/min-250 bar
ank capacities		
lydraulic oil		125 I
uel tank		80 1
loise and vibration		
loise at driving position (LpA)		92 dB
loise to environment (LwA)		110 dB
Aiscellaneous		
Steering wheels (front / rear)		2/2
		2/2
Irive wheels (front / rear)		
Controls		Monolever

MXT 1740 P - Dimensional drawing








MXT 1740 P - Load chart

Machine on tires with forks Metric 60° 67 50° 13.70¹⁴ 13 200kg 40°12 11 10 9 309 2 7 6 20° 5 집 4000kg 20 10° 2 0° 6:20 of 8.00-00 0 9 4 2 7 Ρ| З 1 - _کو.و 5.22-2 2 X 2 2 X X

Machine on lowered stabilisers with forks Metric

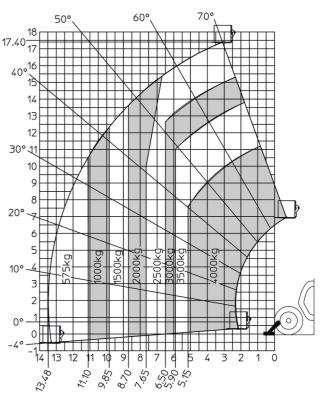



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes