

Ficha técnica :




# MXT 1740 P

---



| Capacities                                  |           | Métrico  |
|---|-----------|--|
| Max. capacity                               |           | 4000 kg  |
| Max. lifting height                         |           | 17.40 m  |
| Max. outreach                               |           | 13.48 m  |
| Weight and dimensions                       |           |  |
| Overall length to carriage                  | l11       | 6.20 m   |
| Overall width                               | b1        | 2.38 m   |
| Overall height                              | h17       | 2.59 m   |
| Wheelbase                                   | y         | 2.90 m   |
| Ground clearance                            | m4        | 380 mm   |
| Overall cab width                           | b4        | 0.78 m   |
| External turning radius (over tyres)        | Wa1       | 4.05 m   |
| Unladen weight (with forks)                 |           | 11235 kg   |
| Overall weight                              |           | 11235 kg   |
| Forks length / width / section              | l / e / s | 1200 mm x 125 mm x 50 mm                               |
| Performances                                |           |  |
| Lifting                                     |           | 13.60 s  |
| Lowering                                    |           | 9.40 s   |
| Extension                                   |           | 25 s   |
| Retraction                                  |           | 14.10 s  |
| Crowd                                       |           | 4.10 s   |
| Dump  |           | 3.20 s   |
| Engine                                      |           |  |
| Engine brand                                |           | Perkins  |
| Engine nom                                  |           | Stage IIIA   |
| Engine model                                |           | 1104D-44T EPA  |
| Number of cylinders / Capacity of cylinders |           | 4 - 4.40 l   |
| I.C. Engine power rating - Power            |           | 92 Hp / 70 kW  |
| Max. torque                                 |           | 392 Nm   |
| Transmission                                |           |  |
| Transmission type                           |           | Torque converter with manual transmission              |
| Number of gears (forward / reverse)         |           | 4 / 4  |
| Max. travel speed                           |           | 28 km/h  |
| Parking brake                               |           | Manual   |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Hydraulics                                  |           |  |
| Hydraulic pump type                         |           | Gear pump  |
| Hydraulic flow / Pressure                   |           | 96.70 l/min-250 bar                                    |
| Tank capacities                             |           |  |
| Hydraulic oil                               |           | 125 l  |
| Fuel tank                                   |           | 80 l   |
| Noise and vibration                         |           |  |
| Noise at driving position (LpA)             |           | 92 dB  |
| Noise to environment (LWA)                  |           | 110 dB   |
| Miscellaneous                               |           |  |
| Steering wheels (front / rear)              |           | 2 / 2  |
| Drive wheels (front / rear)                 |           | 2 / 2  |
| Controls                                    |           | Monolever  |

MXT 1740 P - Diagrama dimensional

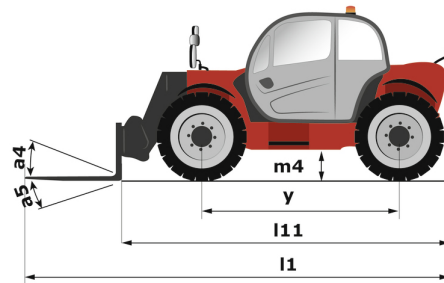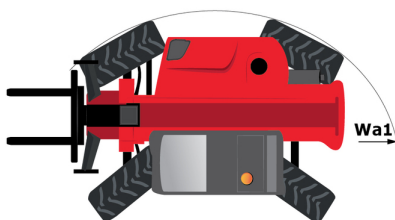

# MXT 1740 P - Diagramas de carga

## Machine on tires with forks Metric



## Machine on lowered stabilisers with forks Metric





 **MANITOU**  
**HANDLING YOUR WORLD**

**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes