Технический паспорт ТЕХНИЧЕСКОЕ ОПИСАНИЕ:

MXT 1740 P







Ass. capacity Ass. care		МХТ 1740 Р СОЗДАННЫЙ НА 20 МАЯ 2024 Г., 21.20.4
Vas. Infining height (abs. outbrach height and dimensions 17.49 m Max. Autbrach height and dimensions 111	Capacities	Метрический
Max. outrosch	Max. capacity	4000 kg
Melyinard differentions	Max. lifting height	17.40 m
111 6.20 m	Max. outreach	13.48 m
Decal selegith Decal place	Weight and dimensions	
Needline h h 7	Overall length to carriage	l11 6.20 m
Wheelbase y 2.99 m Washingtond clearance md 0.38 m betail cab width b4 0.78 m cytemal tuming radius (over tyes) Wa1 4.05 m Intaked weight (width (set)) 11225 kg 11225 kg bewall weight 11225 kg 11225 kg okes longht / width / settion 1 / e / s 120 mm x 125 mm / 59 mm refrontances 1 / e / s 120 mm x 125 mm / 59 mm refrontances 1 / e / s 120 mm x 125 mm / 59 mm refrontances 1 / e / s 120 mm x 125 mm / 59 mm refrontances 2 / e / s 120 mm x 125 mm / 59 mm refrontances 2 / e / s 120 mm x 125 mm / 59 mm refrontances 2 / e / s 120 mm x 125 mm / 59 mm refrontances 2 / e / s 120 mm x 125 mm / 59 mm refrontances 2 / e / s 12 / e / s refrontances 2 / e / s 2 / e / e / s reproduces 2 / e / e / e / e / e / e / e / e / e /	Overall width	b1 2.38 m
Name	Overall height	h17 2.59 m
Name		
New Book with Chee March	Ground clearance	
internal tuming addits (over types) Wal 4.05 m Jundade weight (with forks) 11235 kg Invalidation weight (with forks) 11235 kg Invalidation weight (with forks) 1120 mm x 125 mm / 50 mm Verlation (with forks) 11 (e) s Performances 11 (e) s Lifting 3.00 s Unweining 9.40 s Systemston 4.10 s Stebraction 4.10 s Drump 3.20 s Engine Perkins Engine mode Stage lills Engine model 5.50 mm Unmber of cylinders / Capacity of cylinders 4.4.40 l G. Engine power rating - Power 3.92 km Mater. Lorque 3.92 km Fransmission Torque converter with manual transmission Internal strains type Torque converter with manual transmission Value L. Eval Speed 4.1.4 Mm Parking brake 0li-immersed multi-discs braking on front & reaches Paydraulic 9.6 Cear pump Hydraulic flow / Pressure 96.70 l/min/250 bar Antic ex		
Unident weight (with forks) 11235 kg Cocks length / widh / section 1 / e / s Performances 1 / e / s Lifting 13.00 cm Covering 9.40 cs Systemston 2.5 s Systemston 14.10 s Drowd 4.10 s Dump 3.20 s Engine band Perkins Engine model 114.00 s Number of cylinders / Capacity of cylinders 4.4 4.40 t C. Engine power stains; Power 9.2 km Max. torque 3.20 km Formassission type 4.4 4.40 t C. Engine power stains; Power 9.2 km formassission type 7.0 km further of cylinders / Capacity of cylinders 7.0 km formassission type 9.2 km formassission type 4.4 4.40 t formassission type 4.7 km further of cylear (toward / reverse) 9.2 km formassission type 6.0 km further of pears (toward / reverse) 9.0 km formassission type 6.0 km		
Dezall weight		
Forks length / width / section 1 / e / s 1200 mm x 125 mm / 50 mm Fulfithing 1 3.60 s 9.40 s 9.40 s 25 s 8.64 ctension 25 s 8.64 ctension 14.10 s 25 s 8.64 ctension 14.10 s 3.20 s 14.10 s 3.20 s 9.40 s 3.20 s 9.64 s 1.00 s 3.20 s 9.60 s		
Tend	•	-
13.60 s 13.6		1, 6, 6
covering 9.40 s cotension 25 s charsion 11.10 s chowl 4.10 s chowl 4.10 s chould 3.20 s chighe ————————————————————————————————————		13 60 s
Extension 25 s Intension 11.10 s Drump 3.20 s Engine 3.20 s Engine Implies 8 Engine norm Stage IIIA Engine power arting - Power \$1104-44T EPA Unwheer of cylinders / Capacity of cylinders 4-4.40 I .C. Engine power rating - Power 92 Hp / 70 kW Max. torque 392 km Transmission 9 If ransmission type Torque converter with manual transmission with the reverse with reverse with the reverse with reverse		
Retraction	-	
Crowd 4.10 s Dump 3.20 s Engine Perkins Engine brand Stage IIIA Engine nome Stage IIIA Incline model 11040-44T EPA Unwhere of cylinders / Capacity of cylinders 4 - 4.40 l .C. Engine power rating - Power 92 Hp / 70 kW Max. torque 392 Nm Transmission type Torque converter with manual transmission type Vumber of gears (forward / reverse) 4 / 4 Variety beyed AManual Service brake 014-mmersed multi-discs braking on front & rearrest Service brake 014-mmersed multi-discs braking on front & rearrest Service brake 014-mmersed multi-discs braking on front & rearrest Service brake 014-mmersed multi-discs braking on front & rearrest Service brake 015-mmersed multi-discs braking on front & rearrest Service brake 016-mmersed multi-discs braking on front & rearrest Service brake 016-mmersed multi-discs braking on front & rearrest Service brake 016-mmersed multi-discs braking on front & rearrest Service brake 015-mmersed multi-discs braking on fron		
Dump 3.20 s Engine 1000 Engine brand Perkins Engine model 11040-44T EPA Humber of cylinders / Capacity of cylinders 4 - 4.40 I 2. Engine power rating - Power 92 Hp / 70 kW Max. torque 392 Nm Transmission Torque converter with manual transmission type Number of gears (forward / reverse) 4 / 4 Max. tavel speed 28 km/h Parking brake 01-immersed multi-discs braking on front & reaking brake Advising brake 01-immersed multi-discs braking on front & reaking brake Advisigle flow / Pressure 6 Gear pump Advisigle flow / Pressure 96.70 //min-250 bar Advisigle flow / Pressure 80 I Violes and Myration 80 I Violes and Myration 92 dB Violes and Myration position (LpA) 92 dB Violes and Myration position (LpA) 92 dB Violes en environment (LwA) 110 dB Miscellancous 2 / 2 Steering weekels (front / rear) 2 / 2		
Engine brand Perkins Stage IIIA Fracting ine model Perkins Grigine model Perkins Grigine model Perkins Grigine power rating - Power Perkins Grigine power rating - Power Perkins P		
Perkins Perk	·	3.20 8
Engine nome Stage IIIA Engine model 11040-44T EPA Number of cylinders / Capacity of cylinders 4 - 4.40 I 2. Engine power rating - Power 92 Hp / 70 kW Max. torque 392 Nm Transmission Torque converter with manual transmission Number of gears (forward / reverse) 4 / 4 Max. travel speed 28 km/h Parking brake Manual Service brake Oil-immersed multi-discs braking on front & reverse axiles Hydraulics Gear pump Hydraulic flow / Pressure 96.70 /min-250 bar Full cult can be used to evide and wibration 125 I Voice and driving position (LpA) 92 dB Voice on victoring front / Pears 92 dB Steering wheels (front / rear) 2 / 2 Ories wheels (front / rear) 2 / 2		Dorking
Tangine mode 11040-44T FPA	•	
Author of cylinders / Capacity of cylinders A. E. Engine power rating - Power Max. torque Transmission Transmission type Number of gears (forward / reverse) Adv. tavel speed Acking brake Ack	•	-
C. Engine power rating - Power Ast. Torque 392 Mp / 70 kW 392 Nm	•	
Max. torque 392 Mm Transmission type Number of gears (forward / reverse) Max. tavel speed		
Transmission type Transmission type Transmission type A	• •	
Transmission type Number of gears (forward / reverse) Ad / 4 Adax. travel speed Adax. travel speed Aday. tr	•	392 Nm
Aumber of gears (forward / reverse) Max. travel speed 28 km/h Manual Oil-immersed multi-discs braking on front & reaxles Pydraulics Hydraulic pump type Hydraulic flow / Pressure Fank capacities Hydraulic oil Fuel tank Noise and vibration Noise and vibration Noise and vibration Noise at driving position (LpA) Noise to environment (LwA) Miscellaneous Steering wheels (front / rear) Orive wheels (front / rear) 4 / 4 4 / 4 28 km/h Manual Oil-immersed multi-discs braking on front & reaxles Rear pump 9 6.70 1/min-250 bar 9 96.70 1/min-250 bar 125 1 80 1 125 1 80 1 110 dB 110 dB		
Alax. travel speed Parking brake Service brake Pydraulics Pydraulic pump type Pydraulic flow / Pressure Fank capacities Pydraulic oil Fuel tank Voise and vibration Voise at driving position (LpA) Voise to environment (LwA) Voise to environment (LwA) Voise else (front / rear) Voie wheels (front / rear) Voie wheels (front / rear) Voise to environment (Front / rear) Voise wheels (front / rear) Zesure to the Manual Vois end vibration Vois	•	
Parking brake Manual Oil-immersed multi-discs braking on front & re axles Hydraulics Hydraulic pump type Hydraulic flow / Pressure Fank capacities Hydraulic oil Fuel tank Voise and vibration Voise at driving position (LpA) Noise to environment (LwA) Wiscellaneous Steering wheels (front / rear) Orive wheels (front / rear) Manual Oil-immersed multi-discs braking on front & re axles Gear pump 96.70 I/min-250 bar 125 I 125 I 80 I 92 dB 110 dB 92 dB 110 dB		
Service brake Oil-immersed multi-discs braking on front & reaxles -tydraulics -tydraulic pump type -tydraulic flow / Pressure -fank capacities -tydraulic oil -tuel tank -tuel tank -tuel tank -toise and vibration -toise at driving position (LpA) -toise to environment (LwA) -toise t	·	
Aydraulic pump type Aydraulic flow / Pressure Fank capacities Aydraulic oil Fuel tank Noise and driving position (LpA) Noise to environment (LwA) Wiscellaneous Steering wheels (front / rear) Orive wheels (front / rear) Age and vibration Sear pump Gear pump 96.70 l/min-250 bar Fank capacities 96.70 l/min-250 bar 96.70 l/min-250 bar 97.70 l/min-250 bar 98.70 l/min-250 bar 98.70 l/min-250 bar 98.70 l/min-250 bar 99.70 l/	Parking brake	
Hydraulic pump type Gear pump Hydraulic flow / Pressure 96.70 l/min-250 bar Fank capacities Use of the stand of the sta	Service brake	
Any draulic flow / Pressure 96.70 l/min-250 bar Fank capacities 125 l Hydraulic oil 80 l Eucl tank 80 l Noise and vibration 92 dB Noise to environment (LwA) 110 dB Wiscellaneous 2 / 2 Orive wheels (front / rear) 2 / 2 Drive wheels (front / rear) 2 / 2	-lydraulics	
Fank capacities 125 I Hydraulic oil 80 I Euel tank 80 I Noise and vibration 92 dB Noise to environment (LwA) 110 dB Wiscellaneous 2 / 2 Drive wheels (front / rear) 2 / 2 Drive wheels (front / rear) 2 / 2	Hydraulic pump type	Gear pump
Hydraulic oil 125 I Fuel tank 80 I Noise and vibration Noise at driving position (LpA) 92 dB Noise to environment (LwA) 110 dB Wiscellaneous Steering wheels (front / rear) 2 / 2 Drive wheels (front / rear) 2 / 2	Hydraulic flow / Pressure	96.70 l/min-250 bar
Viel tank 80 I Noise and vibration Noise at driving position (LpA) 92 dB Noise to environment (LwA) 110 dB Miscellaneous Steering wheels (front / rear) 2 / 2 Drive wheels (front / rear) 2 / 2	Tank capacities	
Noise and vibration Noise at driving position (LpA) Noise to environment (LwA) Miscellaneous Steering wheels (front / rear) Drive wheels (front / rear) 2 / 2	Hydraulic oil	125
Noise at driving position (LpA) Noise to environment (LwA) Miscellaneous Steering wheels (front / rear) 2 / 2 2 / 2	Fuel tank	80 I
Noise at driving position (LpA) Noise to environment (LwA) Miscellaneous Steering wheels (front / rear) 2 / 2 2 / 2	Noise and vibration	
Noise to environment (LwA) Miscellaneous Steering wheels (front / rear) Orive wheels (front / rear) 2 / 2		92 dB
Miscellaneous Steering wheels (front / rear) 2 / 2 Orive wheels (front / rear) 2 / 2		
Steering wheels (front / rear) 2 / 2 Drive wheels (front / rear) 2 / 2		
Orive wheels (front / rear) 2 / 2		2/2
MODOLOVOE	Controls	Monolever

МХТ 1740 Р - габаритный чертеж









МХТ 1740 Р - Диаграмма нагрузки

Machine on tyres with forks Metric

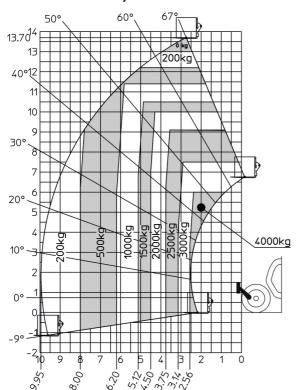

Machine on lowered stabilisers with forks Metric

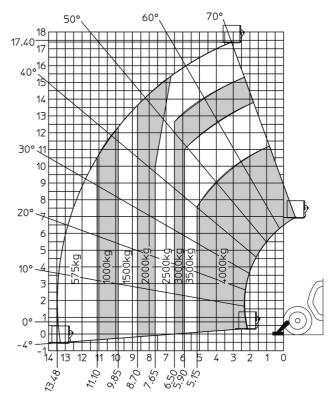





Головной офис

В.Р. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France (Франция) Телефон: 00 33 (0)2 40 09 10 11 - Факс: 00 33 (0)2 40 09 10 97 www.manitou.com



В данной брошюре описываются версии конфигурации и опции продуктов Manitou, которые могут отличаться в зависимости от оборудования. Описанное в данной брошюре оборудование может, в зависимости от версии, быть стандартным, опциональным или недоступным. Комания Manitou оставляет за собой право в любое время изменять приведенные и описанные характеристики без предварительного уведомления. Указанные технические характеристики не являются обязательными для производителя. Для получения дополнительной информации обратитесь к своему дилеру Manitou. Этот документ не имеет обязывающего, договорного характера. Описание продукции не имеет обязывающего, договорного характера. Список технических характеристик не является исчерпывающим. Логотипы и средства визуальной идентификации являются собственностью Manitou, их несанкционированное использование запрещено. Все права защищены. Фотографии и схемы в этой брошюре предоставлены только для ознакомления и в качестве справочной информации.

Manitou BF SA — Компания с ограниченной ответственностью и советом директоров — Акционерный капитал: 39 668 399 евро — Номер 857 802 508 в Реестре коммерсантов и предприятий Нанта