R135 GEN:2


SKID LOADERS





| R135 GEN:2 Created | on May 10, 2 | 2024 at 2:23:26 AM UTC |
|--------------------|--------------|------------------------|
| | | |

| Capacities | | Imperial |
|--|-----|-----------------------------------|
| Rated Operating Capacity | | 1350 lb |
| Rated Operating Capacity with Optional Counterweight | | 1499 lb |
| Unladen weight | | 5255 lb |
| Weight and dimensions | | |
| Overall Operating Height - Fully Raised | h27 | 144 in |
| Height to Hinge Pin – Fully Raised | h28 | 110 in |
| Overall Height to top of ROPS | h17 | 76 in |
| Dump angle at full height | a5 | 40 ° |
| Dump height | h29 | 83 in |
| Dverall length with bucket | l16 | 121 in |
| Dump reach - Full height | r6 | 23 in |
| Rollback at ground | a13 | 28 ° |
| eat to ground height | h30 | 34 in |
| Vheelbase | У | 37 in |
| Overall width less bucket | b1 | 54 in |
| Bucket Width | e1 | 54 in |
| Ground clearance | m4 | 8 in |
| Overall length - Less Bucket | 12 | 93 in |
| learance Radius - Front with Bucket | b18 | 73 in |
| learance Circle - Front without Bucket | b19 | 44 in |
| Clearance Circle - Rear | wa1 | 54 in |
| Performances | | |
| Fravel speed (unladen) | | 8 mph |
| Wheels | | |
| itandard tires | | 10.00x16.5 HD |
| ingine | | |
| ingine brand | | Yanmar |
| ingine model | | 4TNV88C |
| ingine norm | | Stage IIIA, Stage V, Tier 4 final |
| iross Power | | 34.30 kW |
| let Power | | 33.20 kW |
| Nax. torque / Engine rotation | | 108 ft/lbs / 1820 rpm |
| Power source | | Diesel |
| Battery voltage | | 12 V |
| Starter | | 2.30 kW |
| lydraulics | | |
| itandard flow - Auxiliary hydraulics | | 17 US gpm |
| ank capacities | | |
| uel tank | | 16 US gal |
| Displacement | | 0.58 US gal |
| Noise and vibration | | |
| Noise to environment (LwA) | | 101 d B |
| Whole-Body Vibration (ISO 2631-1) | | 0.81 m/s ² |
| Vibration to whole hand /arm | | < 1.77 m/s ² |

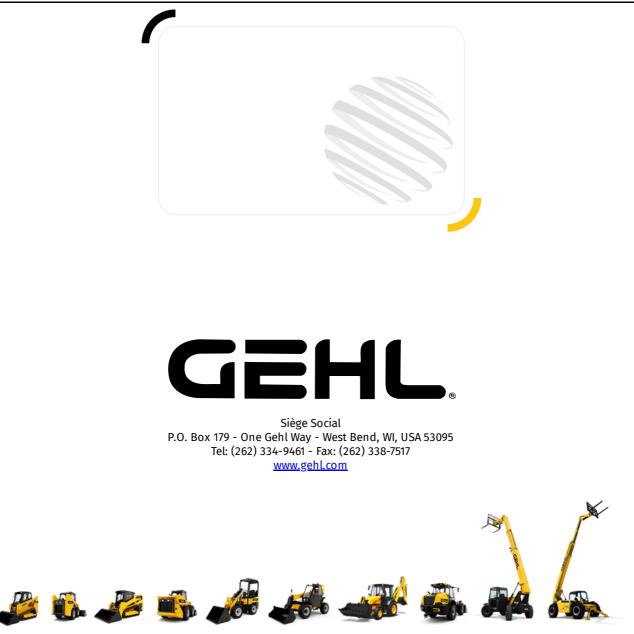

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend