

GCT 3-14

GCT




GEHL®


Capacities		Metrisch		US-System	
Max. capacity			1250 kg		2756 lb
Max. lifting height			4.30 m		14 ft 1 in
Max. outreach			2.62 m		8 ft 7 in
Breakout force with bucket			1880 daN		1880 daN
Weight and dimensions					
Wheelbase	y		2.13 m		7 ft
Ground clearance	m4		0.29 m		11 in
Overall cab width	b4		0.66 m		2 ft 2 in
Tilt-up angle	a4		23 °		23 °
Tilt-down angle	a5		116 °		116 °
External turning radius (over tyres)	Wa1		2.62 m		8 ft 7 in
Overall weight			2750 kg		6063 lb
Performances					
Crowd			3.40 s		3.40 s
Dump			2.60 s		2.60 s
Engine					
Engine brand			Yanmar		Yanmar
Engine norm			Stage V / Tier 4 final		Stage V / Tier 4 final
Engine model			3TNV88C-DMU		3TNV88C-DMU
Number of cylinders / Capacity of cylinders			3 - 1642 cm ³		3 - 100 in ³
I.C. Engine power rating - Power			35.10 Hp / 26.20 kW		35.10 Hp / 26.20 kW
Max. torque / Engine rotation			105 Nm @ 1950 rpm		77 ft/lbs @ 1950 rpm
Drawbar pull (Laden)			2000 daN		2000 daN
HVO validated (according to EN 15940 standard)			Ja		Ja
Transmission					
Transmission type			Hydrostatic		Hydrostatic
Number of gears (forward / reverse)			2 / 2		2 / 2
Parking brake			Automatic negative parking brake		Automatic negative parking brake
Service brake			Hydraulic servo brake		Hydraulic servo brake
Hydraulics					
Hydraulic pump type			Gear pump		Gear pump
Hydraulic flow / Pressure			48 l/min-235 bar		13 US gpm-3408 PSI
Tank capacities					
Hydraulic oil			39 l		10 US gal
Fuel tank			35 l		9 US gal
Miscellaneous					
Safety cab homologation			ROPS - FOPS level 1 cab		ROPS - FOPS level 1 cab
Controls			Joystick		Joystick

GCT 3-14 - Traglasttabellen

Machine on tyres with forks Metric

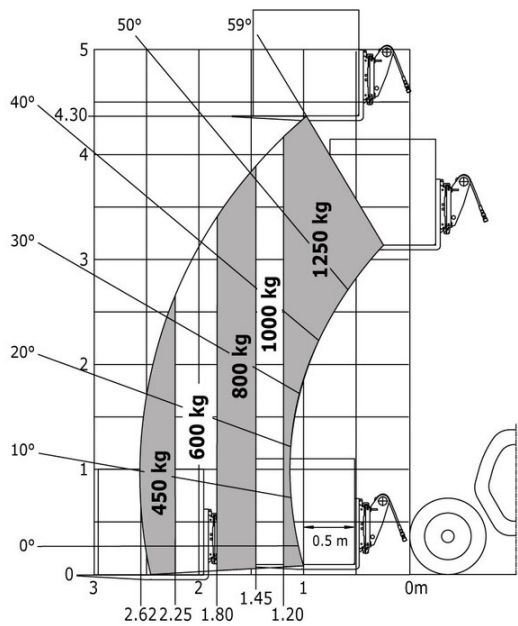

Machine on tyres with forks Imperial

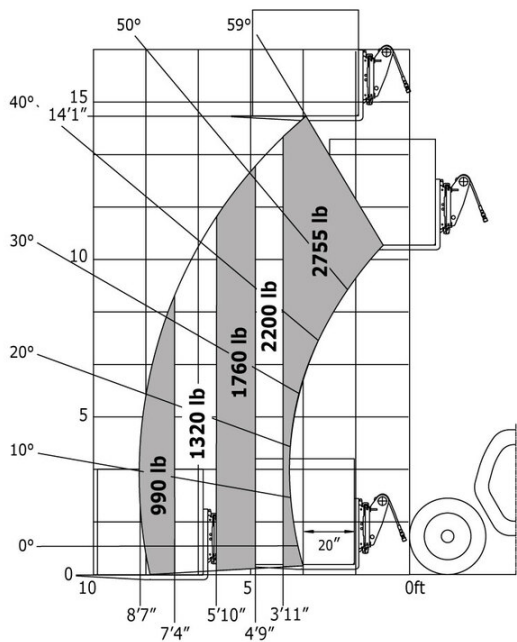



Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend