R134


SKID LOADERS







	k134 Cleado et 19 de Illayo de 2024, 00.31.43 (
Capacities	Métrico
Rated Operating Capacity	612 kg
Unladen weight	2200 kg
Tipping capacity	1224 kg
Weight and dimensions	
Overall Operating Height - Fully Raised	h27 3584 mm
Height to Hinge Pin – Fully Raised	h28 2794 mm
Overall Height to top of ROPS	h 17 1826 mm
Dump angle at full height	a5 42 °
Dump height	h29 2197 mm
Overall length with bucket	l16 2952 mm
Dump reach - Full height	r6 528 mm
Rollback at ground	a13 29 °
Rollback Angle at Full Height	a4 99 °
Seat to ground height	h30 853 mm
Wheelbase	y 923 mm
Overall width less bucket	b1 1346 mm
Bucket Width	e1 1562 mm
Ground clearance	m4 211 mm
Overall length - Less Bucket	l2 2314 mm
Clearance Radius - Front with Bucket	b18 1758 mm
Clearance Circle - Front without Bucket	b19 1102 mm
Clearance Circle - Rear	wa1 1484 mm
Performances	
Travel speed (unladen)	10.70 km/h
Wheels	
Transmission type	Hydrostatic
Standard tires	10.00 x 16.5 PR Heavy Duty
Engine	
Engine brand	Yanmar
Engine model	4TNV88
Engine norm	Stage IIIA
Gross Power	48.80 Hp
Max. torque / Engine rotation	140 Nm / 1600 rpm
Power source	Diesel
Number of cylinders	4
Battery voltage	12 V
· · · · ·	12 V 12 V
Accessory plug	55 A
Alternator - Ampere	
Starter	3 kW
Hydraulics	
Standard flow - Auxiliary hydraulics	63.40 l/min 190 bar
	190 har
Auxiliary Hydraulic Pressure	
Tank capacities	
Tank capacities Fuel tank	47 l
Tank capacities Fuel tank Hydraulic oil tank capacity	47 l 30 l
Tank capacities Fuel tank Hydraulic oil tank capacity Displacement	47 l 30 l 2.20 l
Tank capacities Fuel tank Hydraulic oil tank capacity	47 l 30 l

R134 - Diagrama dimensional







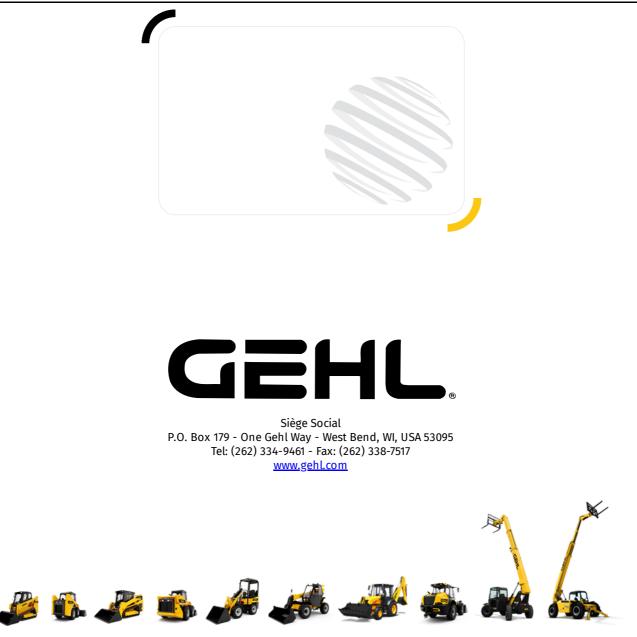

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend