


Technical sheet :

# ***SUGAR BEET BUCKET***

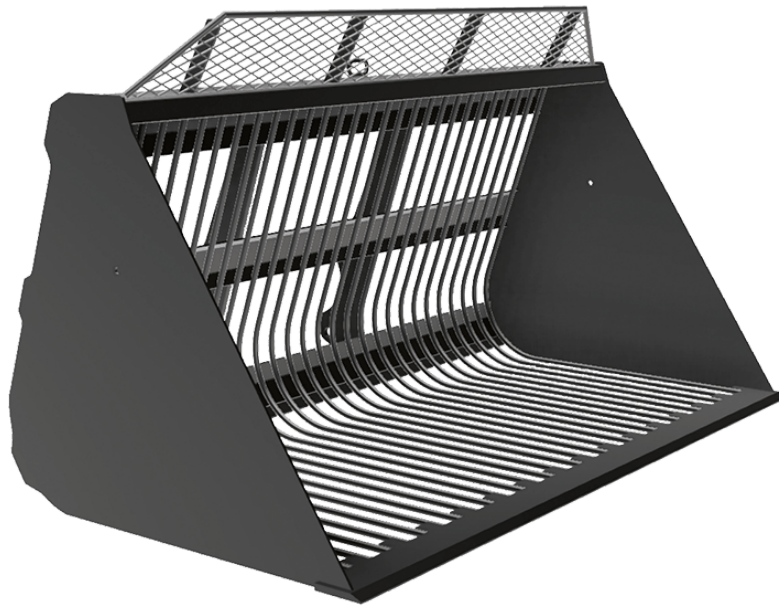

## **Customer benefits**

- Perfectly adapted to the handling of sugar beets and other root crops & tubercules by scooping the beet and leaving the soil behind.
- Openwork spill guard for a better visibility.
- Strong structure for long lasting use.
- Not adapted to earthwork or stone handling.







## **Technical characteristics**

- Openwork structure made of Ø 20 mm / 1 in steel bars.
- Bars spread 60 mm / 2 in, perfect for sugar beets.
- Plain sides.
- Maximal density of the transported product: 700 kg/m<sup>3</sup> / 44 lb/ft<sup>3</sup>.

[The 3D picture at the top of this page is the reference BSB 2450 / 2500 - 757953].

| Technical characteristics          |     | BSB 2450 / 2500 |
|------------------------------------|-----|-----------------|
| Distance to center of gravity (mm) |     | 502             |
| Capacities                         |     |                 |
| Capacity (kg)                      |     | 1390            |
| Heaped capacity (l)                |     | 2500            |
| Weight                             |     |                 |
| Overall weight (kg)                |     | 520             |
| Weight and dimensions              |     |                 |
| Overall height (mm)                | h17 | 1380            |
| Overall length (mm)                | l1  | 1375            |
| Width (mm)                         |     | 2450            |
| Depth (mm)                         | p5  | 1280            |
| Working Parameters                 |     |                 |
| Required machine equipment         |     | ×               |

| Machines compatibility           |  | BSB 2450 / 2500 |
|----------------------------------|--|-----------------|
| Reference number                 |  | 757953          |
| MLT 635-130 PS+ (S2)             |  | X               |
| MLT 635-140 V+ (S2)              |  | X               |
| MLT 733-115 (S2)                 |  | X               |
| MLT 738-130 PS+ (S1)             |  | X               |
| MLT 742-130 PS+ (S1)             |  | X               |
| MLT 742-140 V+ (S1)              |  | X               |
| MLT 841-145 PS+                  |  | X               |
| MLT 940-140 V+ (S2)              |  | X               |
| MLT 1041-145 PS+L                |  | X               |
| MLTX 732                         |  | X               |
| MLTX 735 T LSU                   |  | X               |
| MLTX 735 T LSU (70 KW)           |  | X               |
| MLTX 738-130 PS+ (S1)            |  | X               |
| MLTX 841 - 145 PS+               |  | X               |
| MLTX 1041-145 PS+L               |  | X               |
| MLT 630-105 ST4 <b>OLD</b>       |  | X               |
| MLT 630-105 V CP ST4 <b>OLD</b>  |  | X               |
| MLT 630-105 V ST4 <b>OLD</b>     |  | X               |
| MLT 630-115 (S1) <b>OLD</b>      |  | X               |
| MLT 630-115 V (S1) <b>OLD</b>    |  | X               |
| MLT 630-115 V CP (S1) <b>OLD</b> |  | X               |
| MLT 635-130 PS+ ST4 <b>OLD</b>   |  | X               |
| MLT 635-130 PS+ (S1) <b>OLD</b>  |  | X               |
| MLT 635-140 V+ (S1) <b>OLD</b>   |  | X               |
| MLT 635-140 V+ ST4 <b>OLD</b>    |  | X               |
| MLT 730-115 V (S1) <b>OLD</b>    |  | X               |
| MLT 730-115 V CP (S1) <b>OLD</b> |  | X               |
| MLT 730-115 V CP ST4 <b>OLD</b>  |  | X               |
| MLT 730-115 V ST4 <b>OLD</b>     |  | X               |
| MLT 733-115 <b>OLD</b>           |  | X               |
| MLT 733-115 LSU (S1) <b>OLD</b>  |  | X               |
| MLT 733-115 LSU ST4 <b>OLD</b>   |  | X               |
| MLT 733-115 ST4 <b>OLD</b>       |  | X               |
| MLT 737-130 PS+ (S1) <b>OLD</b>  |  | X               |
| MLT 737-130 PS+ ST4 <b>OLD</b>   |  | X               |
| MLT 741-130 PS+ (S1) <b>OLD</b>  |  | X               |
| MLT 741-140 V+ (S1) <b>OLD</b>   |  | X               |
| MLT 741-140 V+ ST4 <b>OLD</b>    |  | X               |
| MLT 840-145 PS+ <b>OLD</b>       |  | X               |
| MLT 940-140 V+ (S1) <b>OLD</b>   |  | X               |
| MLT 940-140 V+ ST4 <b>OLD</b>    |  | X               |
| MLT 1040-145 PS+ L <b>OLD</b>    |  | X               |
| MLTX 737-130 PS+ <b>OLD</b>      |  | X               |
| MLTX 737-130 PS+ (S2) <b>OLD</b> |  | X               |
| MLTX 741-140 V+ S1 <b>OLD</b>    |  | X               |
| MLTX 840-140 PS+ <b>OLD</b>      |  | X               |
| MLTX 1040-140 PS+ L <b>OLD</b>   |  | X               |

| TABLE SYMBOL  |                            |   |                         |   |   |
|---|----------------------------|---|-------------------------|---|---|
|  | No predisposition required |  | Hydraulic line          |  | Return piping to hydraulic oil tank           |
|  | Electric predisposition    |  | Platform predisposition |  | Tyre handler, cylinder handler predisposition |



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes