


VT275 - NEW

TRACK LOADERS



GEHL®

Capacities		Imperial
Rated Operating Capacity		2750 lb
Operating Capacity At 50% Tipping Load		3929 lb
Rated Operating Capacity with Optional Counterweight		2870 lb
Operating Weight		10051 lb
Unladen weight		9138 lb
Weight and dimensions		
Operating Weight - Approximate		10051 lb
Overall Operating Height - Fully Raised	h27	168 in
Height to Hinge Pin – Fully Raised	h28	129 in
Overall Height to top of ROPS	h17	82 in
Dump angle at full height	a5	42 °
Dump height	h29	99 in
Overall length with bucket	l16	150 in
Dump reach - Full height	r6	35 in
Rollback Angle at Full Height	a4	92 °
Seat to ground height	h30	39 in
Overall width less bucket	b1	71 in
Bucket Width	e1	74 in
Ground clearance	m4	9 in
Overall length - Less Bucket	l2	119 in
Clearance Radius - Front with Bucket	b18	93 in
Clearance Circle - Front without Bucket	b19	59 in
Clearance Circle - Rear	wa1	69 in
Performances		
Travel Speed with Two-Speed Option - Maximum		8 mph
Travel speed (unladen)		6 mph
Engine		
Engine brand		Yanmar
Engine model		4TNV98CT-XNGL
Engine norm		Stage V, Tier 4
Gross Power		53.70 kW
Net Power		52.70 kW
Max. torque / Engine rotation		217 ft/lbs / 1800 rpm
Power source		Diesel
Number of cylinders		4
Engine cooling system		Water
Battery voltage		12 V
Alternator - Ampere		100 A
Starter		3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics		26 US gpm
Auxiliary Hydraulic Pressure		3475 PSI
High-Flow Auxiliary Hydraulics – Option		33 US gpm
High-Flow Auxiliary Hydraulics Pressure – Option		3325 PSI
Tank capacities		
Fuel tank		38 US gal
Reservoir Capacity Hydraulics		6 US gal
Coolant system capacity		5 US gal

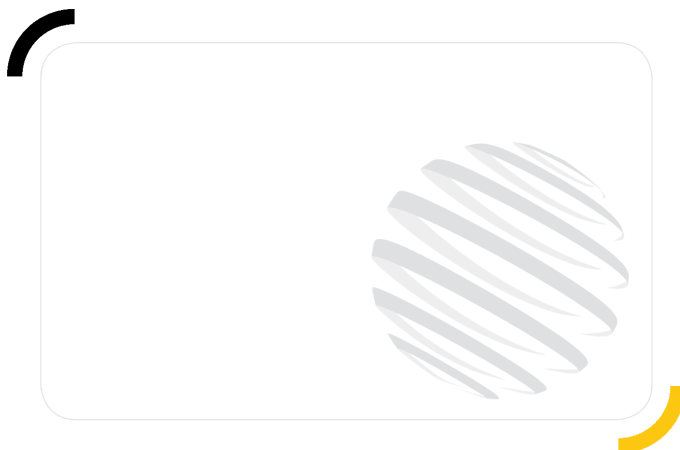

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend