

Technical sheet :

# MT-X 625 H



 **MANITOU**  
HANDLING YOUR WORLD

Capacities		Metric	
Max. capacity		2500 kg	
Max. lifting height		5.85 m	
Maximum outreach		3.40 m	
Breakout force with bucket		3427 daN	
Weight and dimensions			
Overall length to carriage	I11	3.83 m	
Length to face of forks	I2	3.90 m	
Overall width	b1	1.81 m	
Overall height	h17	1.92 m	
Wheelbase	y	2.30 m	
Ground clearance	m4	0.33 m	
Overall cab width	b4	0.79 m	
Tilt-up angle	a4	12 °	
Tilt-down angle	a5	117 °	
External turning radius (over tyres)	Wa1	3.31 m	
Overall weight		4800 kg	
Tires type		Pneumatic	
Standard tires		CAMSO SKS532 12-16.5	
Forks length / width / section	I / e / s	1200 mm x 125 mm x 45 mm	
Performances			
Lifting		8 s	
Lowering		5.40 s	
Extension		5.60 s	
Retraction		4.30 s	
Crowd		3.50 s	
Dump		3.60 s	
Engine			
Engine brand		Kubota	
Engine norm		Stage IIIA	
Engine model		V3307-DI-T-E3B	
Number of cylinders / Capacity of cylinders		4 - 3331 cm³	
Engine power (Hp/kW)		75 Hp / 55.40 kW	
Max. torque / Engine rotation		265 Nm @ 1400 rpm	
Drawbar pull (Laden)		3550 daN	
Transmission			
Transmission type		Hydrostatic	
Number of gears (forward / reverse)		2 / 2	
Max. travel speed		24.90 km/h	
Max. travel speed (may vary according to applicable regulations)		25 km/h	
Parking brake		Automatic negative parking brake	
Service brake		Oil-Immersed multi-discs braking on front axles	
Hydraulics			
Hydraulic pump type		Gear pump	
Hydraulic Pressure		235 bar	
Tank capacities			
Engine oil		11.20 l	
Hydraulic oil		115 l	
Fuel		63 l	
Noise and vibration			
Noise at driving position (LpA)		76 dB	
Noise to environment (LwA)		104 dB	
Vibration on hands/arms		< 2.50 m/s²	
Miscellaneous			
Steering wheels (front / rear)		2 / 2	
Drive wheels (front / rear)		2 / 2	
Safety / Cab certification		Standard EN 15000 / ROPS - FOPS cab (level 1)	
Controls		JSM	



## Options / Finishing

S : Standard / O : Optional / - : Not available

Lifting function
Hydraulic line for quick-release attachments
Operator station
12V plug cigarette lighter type
Air suspension fabric seat - GRAMMER
Bluetooth USB radio - With extra microphone - 100W
Bluetooth USB radio - With integrated microphone - 100W
Car radio antenna
Document holder
Floor mat
Inner rear view mirror
Mirror on rear of the machine
Phone support
Rear wiper
Tuner car radio - 50W
Lighting
Beacon
Complete road lighting
Front and rear work lights on cab (x4)
Rear electric plug
Security
Aggravating movements cut off EN 15000
Battery cut-off
Emergency stop button outside the cab
Sun visor on windshield and roof
Pneumatics
CAMSO SKS HAULER 12-16.5


Standard
0
S
0
0
S/O**
0
0
S
0
S
0
0
S
0
Lighting
S
S
0
S
Security
S
S
S
0
Pneumatics
S

## MT-X 625 H - Dimensional drawing

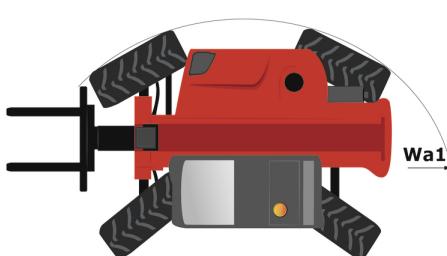

## MT-X 625 H - Load chart

Machine on tires with forks Metric

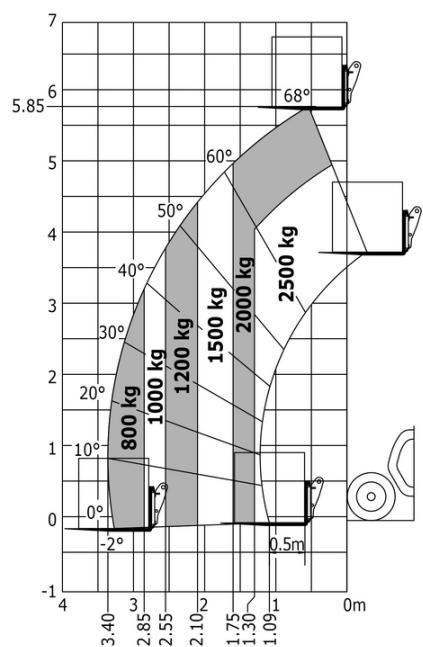

**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)

This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes