

Technical sheet :


ES 614 LI 5P INOX PREMIUM



 **MANITOU**
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	ES 614 LI 5P Inox Premium
1.2	Model Name	Electrical - Lead	
1.3	Power source	Pedestrian	
1.4	Operator type	1400 kg	
1.5	Max. capacity	600 mm	
1.6	Load center of gravity	710 mm	
1.8	Distance from Load backrest to center of rear axle	1393 mm	
1.9	Wheelbase		
Weight			
2.1	Service weight	1310 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	1035 kg / 1690 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	935 kg / 375 kg	
Wheels			
3.1	Tires type	Polyurethane cushion	
3.3	Number of load wheels / Size of load wheels	4 / 82x68	
3.4	Number of stabilizer wheels / Size of the stabilizer wheels	2 / 120x54	
3.5	Number of front wheels / rear wheels	3 / 4	
3.5.2	Number of drive wheels / Size of drive wheels	1/230x70	
3.6	Front wheel gauge	558 mm	
3.7	Rear wheel gauge	381 mm	
Dimensions			
4.15	Fork height in low position	87 mm	
4.19	Overall length	2044 mm	
4.20	Length to face of forks	894 mm	
4.21	Overall width	820 mm	
4.22	Forks section / width / length	70 mm / 185 mm / 1150 mm	
4.24	Fork carriage width	700 mm	
4.32	Ground clearance at centre of wheelbase	24 mm	
4.34	Aisle width for 800 x 1200 pallet lengthways	2481 mm	
4.35	Turning radius	1657 mm	
4.9	Height tiller min. / max.	760 mm / 1250 mm	
Performances			
5.1	Travel speed (laden / unladen)	6 km/h / 6 km/h	
5.2	Lifting speed (laden / unladen)	0.18 m/s / 0.30 m/s	
5.3	Lowering speed (laden / unladen)	0.27 m/s / 0.22 m/s	
5.8	Max Gradeability (laden / unladen)	7 % / 10 %	
5.10	Service brake	Electro magnetic	
Engine			
6.1	Drive motor rating S2 60 min	1.50 kW	
6.2	Lift motor rating at S3 15%	3 kW	
6.3	Battery according to DIN 43531/35/36 A, B, C	DIN 43535-B	
6.4	Battery voltage / capacity	24 V / 250 Ah	
6.5	Battery weight (+/- 5%)	213 kg	
Miscellaneous			
8.1	Type of drive control	AC	
8.4	Sound level at the driver's ear according to DIN 12 053	65 dB	

ES 614 LI 5P Inox Premium - Dimensional drawing

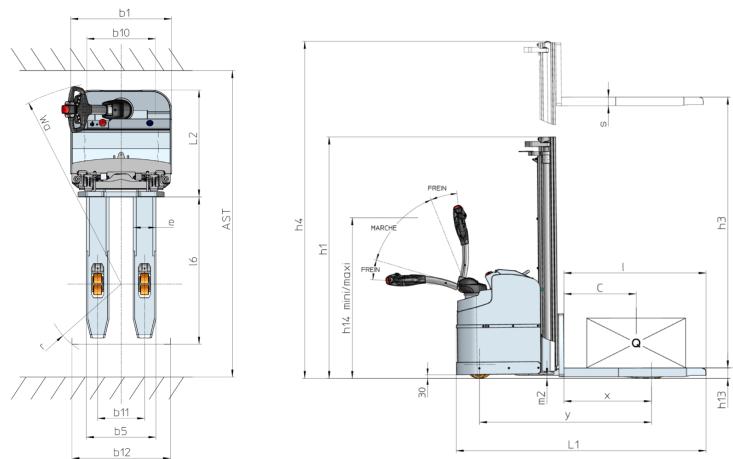

Characteristics of masts and residual capacities

Central Cylinder Duplex (CCD)	CCD 29
h1 - Mast lowered height	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes