Technical sheet:

MLT 937-115 (S1)





	MLT 937-115 (S1) Crea	ated on November 30, 2025 at 3:22 AM UT
Capacities		Metric
Max. capacity	Q	3700 kg
Max. lifting height	h3	9.10 m
Maximum outreach	110	6.55 m
Reach at max. height		2.20 m
Breakout force with bucket		4472 daN
Weight and dimensions		44/2 UdiN
		8235 kg
Unladen weight (with forks)		
Ground clearance	m4	0.44 m
Wheelbase	у	2.81 m
Overall length to carriage (with hitch)	l11	5.12 m
Front overhang		1.36 m
Overall width	b1	2.39 m
Overall cab width	b4	0.95 m
Overall height	h17	2.38 m
Tilt-down angle	a5	133 °
Tilt-up angle	a4	14 °
External turning radius (over tyres)	Wa1	3.93 m
Standard tires		Alliance - A580 - 460/70 R24 159A8
Drive wheels (front / rear)		2 / 2
Steering mode		Manicrab, 2 wheel steer, 4 wheel steer, Crab mode
Performances		Maniciab, 2 wheel steel, 4 wheel steel, Clab mode
		7.75 s
Lifting		
Lowering		7.43 s
Extension		10.91 s
Retraction		9.63 s
Crowd		3.68 s
Dump		3.12 s
Engine		
Engine brand		Deutz
Engine norm		Stage V
Engine model		TCD 3.6 L4
Number of cylinders - Capacity of cylinders		4 - 3621 cm ³
Engine power (Hp / kW)		116 Hp / 85 kW
Max. torque / Engine rotation		460 Nm @1600 rpm
Drawbar pull (Laden)		8400 daN
Reversible fan		Option
neversible (all		
Engine cooling system		4 radiators (water + intercooler + hydraulic oil + transmission oil)
HVO validated (according to EN 15940 standard)		Yes
Transmission		
Transmission type		Torque converter
Gearbox		Powershuttle
Number of gears (forward / reverse)		4 / 4
- , ,		
Max. travel speed (may vary according to applicable regulations)		33 km/h
Differential lock		Limited slip differential on front axle
Parking brake		Automatic negative parking brake
Service brake		Oil-immersed multi-discs braking on front & rear axles
Hydraulics		avies
		Variable displacement nump
Hydraulic pump type		Variable displacement pump
Hydraulic flow - Pressure		150 l/min - 270 bar
Flow sharing distributor		Standard
Tank capacities		405.1
Hydraulic tank capacity		135 l
Fuel		120 l
Diesel Exhaust fluid (AdBlue® type)		10 l
Noise and vibration		
Noise at driving position (LpA) tested following NF EN 12053 norm		75 dB
Vibration on hands/arms		< 2.50 m/s²
Miscellaneous		
Tractor homologation		Tractor homologation
Cab certification		Cabin ROPS - FOPS level 2
Controls		JSM
		CONT

Optional tires tab

	Overall height	Overall width	
TRELLEBORG - TH400 - 460/70 R24 159A8	2.37 m	2.40 m	
TRELLEBORG - TH400 - 500/70 R24 164A8	2.39 m	2.42 m	
MICHELIN - XMCL - 500/70 R24 164A8	2.39 m	2.43 m	
MICHELIN - BIBLOAD - 460/70 R24 159A8	2.37 m	2.40 m	
MICHELIN - BIBLOAD - 500/70 R24 164A8	2.39 m	2.43 m	
MICHELIN - XHA - 15.5 R25 158A2	2.37 m	2.40 m	
NOKIAN - TRI STEEL - 460/65 R24 156A8	2.36 m	2.40 m	
MICHELIN - XMCL - 460/70 R24 159A8	2.37 m	2.40 m	
VREDESTEIN - ENDURION - 460/70 R24 159A8	2.38 m	2.41 m	
VREDESTEIN - ENDURION - 500/70 R24 164A8	2.41 m	2.44 m	
TRELLEBORG - TH500 - 460/70 R24 159A8	2.37 m	2.40 m	
ALLIANCE - A585 - 460/70 R24 159A8	2.37 m	2.40 m	


Options / Finishing


S : Standard / O : Optional / - : Not available

	Classic	Premium
Lifting function		
Attachment hydraulic locking	0	0
Operator station		
Air suspension fabric seat - GRAMMER	0	S
Automatic air conditioning	0	S
Bluetooth USB radio - With extra microphone - 100W	0	0
Bluetooth USB radio - With integrated microphone - 100W	0	S
Boom suspension - "Active CRC"	0	0
Extra front wiper	0	S
Harmony screen - 5 in.	S	S
Lateral wiper	0	0
Low frequency air suspension fabric seat - GRAMMER	0	0
Low frequency air suspension fabric seat with heating - GRAMMER	0	0
Mechanical suspension fabric seat - GRAMMER	S	-
Storage box - On the shelf	0	0
Tuner car radio - 50W	S	-
Motorization/Power		
Auto reversing fan	0	0
Continuous flow hydraulics	0	0
Secondary functions		
Automatic greasing system (AGS) - Chassis + boom	0	0
Lighting		
led front road lights	0	0
LED work lights - On the top of the boom (fixed part) (x2)	0	0

MLT 937-115 (S1) - Dimensional drawing






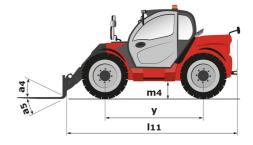


MLT 937-115 (S1) - Load chart

Machine on tires with forks Metric

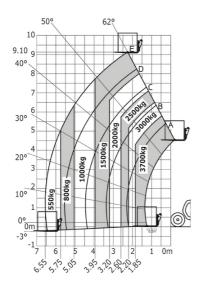

Machine on tires with forks LC 600 mm Metric

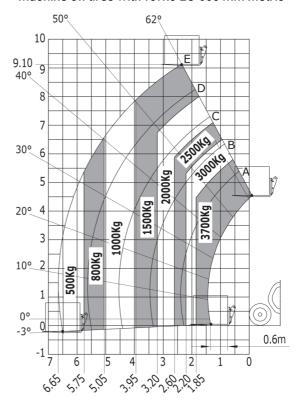





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes