

Technisches Datenblatt :

SE 1008

OXYGEN




 **MANITOU**
HANDLING YOUR WORLD

Capacities		Metrisch
Working height maximum (indoor)	h21	9.99 m
Working height maximum (outdoor)	h21'	9 m
Platform height maximum (indoor)	h7	7.99 m
Platform height maximum (outdoor)	h7'	7 m
Platform capacity	Q	230 kg
Max. capacity on the extension deck		115 kg
Number of people (indoor / outdoor)		2 / 1
Weight and dimensions		
Platform weight*		2210 kg
Platform dimensions (length x width)	lp / ep	2.20 m x 0.79 m
Platform dimensions with extension (length x width)		3.10 m x 0.79 m
Floor height (access)	h20	1.25 m
Overall length	l1	2.42 m
Overall width	b1	0.82 m
Overall height	h17	2.17 m
Overall height (stowed)	h18 ***	1.98 m
Deck opening length	dp	0.90 m
Overall length with platform extension	l15	3.31 m
Outside turning radius - platform	Wa2	2.17 m
Internal turning radius		0 m
Ground clearance with pothole guards deployed	m6	0.02 m
Ground clearance with pothole guards folded	m2	0.08 m
Wheelbase	y	1.75 m
Performances		
Drive speed - stowed		4.50 km/h
Drive speed - raised		0.80 km/h
Raise speed (laden) / Lower speed (laden)		33 s / 32 s
Gradeability		25 %
Indoor and outdoor max Tilt Rating (Fore and Aft / Side-to-Side)		3.50 ° / 1.50 °
Wheels		
Tires type		Non marking
Standard tires		15 x 5 in / 381 x 125 mm
Drive wheels (front / rear)		2 / 0
Steering wheels (front / rear)		2 / 0
Braking wheels (front / rear)		2 / 0
Service brake		Electric
Engine/Battery		
Battery technology		Semi-traction
Number of batteries / Battery nominal voltage / Battery capacity		4 / 6 V / 185 Ah
Battery energy		4.40 kWh
On-board charger (V / A)		24 V / 30 A
Miscellaneous		
Hydraulic Pressure		250 bar
Hydraulic tank capacity		24 l
Sound pressure level (platform work station) (platform work station)		66.60 dB
Vibration on hands/arms		< 0.50 m/s ²
Standards compliance		
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage)


*Varies according to options and standards of the country to which the machine is delivered

*** With folded guardrail

SE 1008 - Traglasttabellen

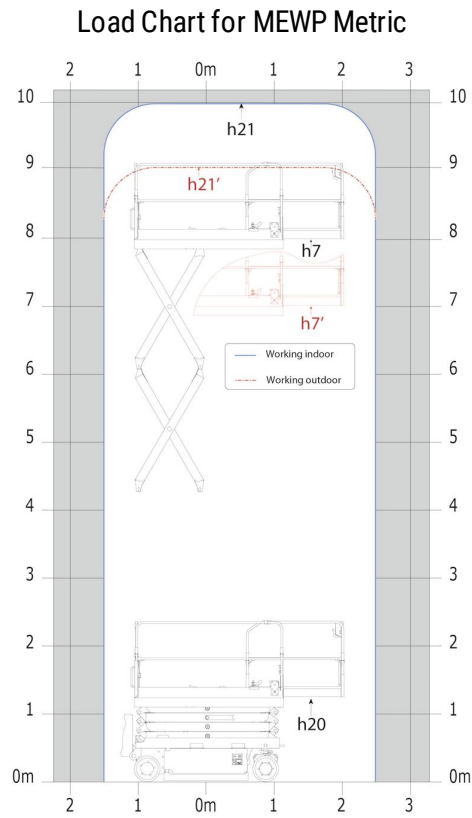

SE 1008 - Maßzeichnung

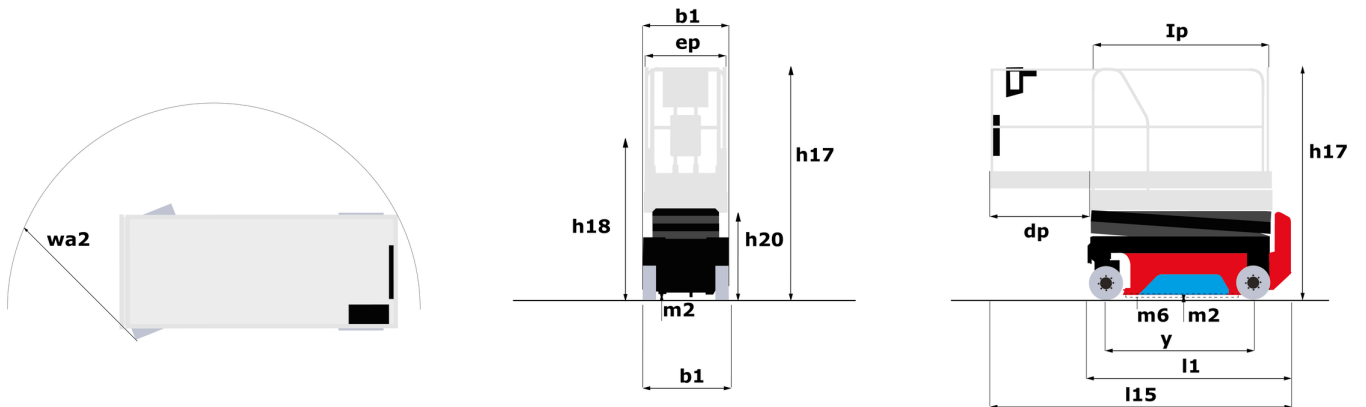

Ausstattung

Standard

2 swing out component trays (hydraulic/electric)
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
Battery - 24V - 185Ah - semi-traction
Battery charge indicator lamp
CAN bus technology
Colour screen with integrated diagnostics
Descent alarm
Easy Link with 2 year Service
Electrical front wheel brake
Emergency stop button in platform and on frame
Folding rails with full height access gate
Hom in the platform
Hour meter
Management of working height according to working place (indoor/outdoor)
Manual emergency lowering
Multi-voltage on-board charger - 24V - 30A - Single-phase
Pothole protection with automatic operation
Side and rear forklift pockets
Sliding basket extension - 90 cm

Optional

Audio warning on all motion
Audio warning on translation
Biodegradable hydraulic oil - Grade 32
Easy Link - With access control keypad
Easy link with remote lock
Electric plug - 110 or 230V - In the basket - With differential circuit breaker - European type
Safety kit - Harness + helmet
Working light (x1) on basket



MANITOU **HANDLING YOUR WORLD**

Hauptsitz

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



Diese Publikation enthält eine Beschreibung der Konfigurationsvarianten und Optionen für Manitou-Produkte, die je nach Ausstattung unterschiedlich sein können. Die in dieser Broschüre vorgestellten Ausstattungen können Teil einer Serie, als Option erhältlich oder je nach Ausführung nicht verfügbar sein. Manitou behält sich das Recht vor, die beschriebenen und dargestellten Spezifikationen jederzeit und ohne Vorankündigung zu ändern. Die angegebenen Spezifikationen sind für den Hersteller nicht bindend. Für weitere Einzelheiten wenden Sie sich bitte an Ihren Manitou-Händler. Es handelt sich nicht um ein vertraglich bindendes Dokument. Die Darstellung der Produkte ist vertraglich nicht bindend. Die Liste der Spezifikationen ist nicht vollständig. Die Logos sowie die visuelle Identität des Unternehmens sind Eigentum von Manitou und dürfen nicht ohne Genehmigung verwendet werden. Alle Rechte vorbehalten. Die in dieser Broschüre enthaltenen Fotos und Diagramme werden nur zu Anschauungs- und Informationszwecken zur Verfügung gestellt.

MANITOU BF SA - Gesellschaft mit beschränkter Haftung mit Verwaltungsrat - Aktienkapital: 39 668 399 Euro - 857 802 508 RCS Nantes