

Scheda tecnica :

# 180 ATJ E RC

OXYGEN



 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                              |         | Metrico  |
|---|---------|--|
| Working height                          | h21     | 18.19 m  |
| Floor height (access)                   | h20     | 0.45 m   |
| Platform height                         | h7      | 16.19 m  |
| Max. outreach                           |         | 10.33 m  |
| Overhang                                |         | 7.43 m   |
| Pendular arm rotation (left / right)    |         | 90 ° / 90 °  |
| Pendular arm rotation (top / bottom)    |         | +65 ° / -59.50 °   |
| Platform capacity                       | Q       | 250 kg   |
| Turret rotation                         |         | 360 °  |
| Platform rotation (right / left)        |         | 90 ° / 90 °  |
| Number of people (indoor / outdoor)     |         | 2 / 2  |
| Weight and dimensions                   |         |  |
| Platform weight*                        |         | 7550 kg  |
| Platform dimensions (length x width)    | lp / ep | 1.80 m x 0.80 m  |
| Overall length                          | l1      | 7.61 m   |
| Overall width                           | b1      | 2.32 m   |
| Overall height                          | h17     | 2.48 m   |
| Overall length (stowed)                 | l9      | 5.43 m   |
| Overall height (stowed)                 | h18 *** | 2.52 m   |
| Counterweight offset (turret at 90°)    | a7      | 0.40 m   |
| Counterweight Oversize / Reach          |         | 0.40 m   |
| External turning radius                 | Wa3     | 3.75 m   |
| Ground clearance at centre of wheelbase | m2      | 0.40 m   |
| Wheelbase                               | y       | 2.30 m   |
| Performances                            |         |  |
| Drive speed - stowed                    |         | 5 km/h   |
| Drive speed - raised                    |         | 1 km/h   |
| Gradeability                            |         | 45 %   |
| Permissible leveling                    |         | 5 °  |
| Wheels                                  |         |  |
| Tires type                              |         | Foam Filled Non Marking  |
| Standard tires                          |         | 914 x 381 mm / 36X15D610   |
| Drive wheels (front / rear)             |         | 2 / 2  |
| Steering wheels (front / rear)          |         | 2 / 2  |
| Braking wheels (front / rear)           |         | 0 / 2  |
| Engine/Battery                          |         |  |
| Engine norm                             |         | Stage V  |
| Battery voltage                         |         | 48 V   |
| Battery nominal voltage / capacity      |         | 48 V / 480 Ah  |
| Battery energy                          |         | 23 kWh   |
| On-board charger (V / A)                |         | 48 V / 60 A  |
| Miscellaneous                           |         |  |
| Ground Pressure                         |         | 10 dan/cm2   |
| Hydraulic Pressure                      |         | 240 bar  |
| Hydraulic tank capacity                 |         | 24 l   |
| Noise to environment (LwA)              |         | < 98 dB  |
| Standards compliance                    |         |  |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage) |

\*Varies according to options and standards of the country to which the machine is delivered

\*\* According to "REDUCE cycle"

## 180 ATJ e RC - Diagramma di carico

Load Chart for MEWP Metric

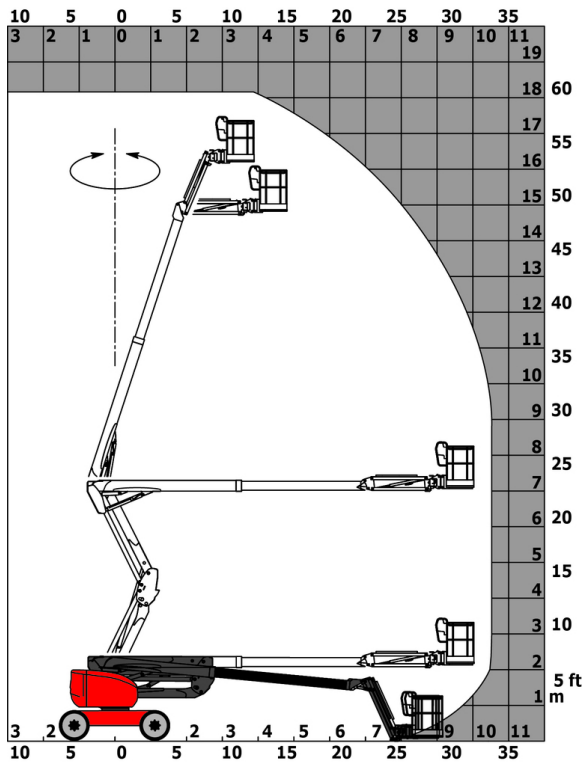

## 180 ATJ e RC - Disegno quotato



# Allestimento

## Standard

220V predisposition in the platform  
 4 simultaneous movements  
 4 wheel drive  
 4 wheel steer with crab mode  
 Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
 Backup electrical pump  
 CAN bus technology  
 Continuous turret rotation  
 Differential locking on rear axle  
 Easy Link with 2 year Service  
 Easy Manager  
 Emergency stop button in platform and on frame  
 Fully galvanized basket with demountable floor  
 Galvanized basket 1,800 mm  
 Hom in the platform  
 Hour meter  
 LED rotating beacon  
 Large color screen on turret  
 Leveling unlocking  
 Load sensing pump  
 Operator presence pedal  
 Oscillating front axle  
 Rear axle with limited slip differential  
 Reserve mode  
 Screen information in the basket  
 Secondary Protection System (SPS)  
 Secondary Protection System (SPS) - With LED red strobe lights  
 Simplified lifting system without spreader bar  
 Slings and securing rings  
 Steer and rotate  
 Turret orientation information

## Opzionale

110 V electric plug 16A  
 Audio warning on all motion  
 Audio warning on all motion - White noise  
 Audio warning on translation - White noise  
 Beeper on movement  
 Biodegradable hydraulic oil - Grade 32  
 Biodegradable oil  
 Bottom screen protection  
 Continuous turret rotation  
 Digicode anti-theft device  
 Earthing and shortcircuiting pre-fitting (Bolted ball)  
 Easy Link - With access control keypad  
 Easy link - With remote lock  
 Electric centralized filling  
 External pneumatic supply source  
 Foam-filled tires 914 x 381 mm / 36X15D610  
 Fully galvanized basket 1800mm / 5'11" with lateral door  
 Galvanized basket 2,100 mm  
 Galvanized basket 2.100 mm / 6'11" with lateral door  
 Hydraulic oil heater  
 Key lock on turret cover  
 Lighting pack  
 Locking the telescope by parameter setting  
 OSS - Operation Safety System  
 Packing for containerization  
 Personalized paintwork  
 Rail protection  
 Safety kit - Harness + helmet  
 Socket 230 V + differential circuit breaker  
 Two safety kits (helmet + harness)  
 Water heater  
 Water predisposition  
 Working light (x1) on basket



 **MANITOU**  
**HANDLING YOUR WORLD**

**Sede centrale**

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

[www.manitou.com](http://www.manitou.com)



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes