

Technical sheet :

# 180 ATJ CR

---




 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                              |         | Metric  |
|---|---------|---|
| Working height                          | h21     | 18.18 m   |
| Platform height                         | h7      | 16.18 m   |
| Maximum outreach                        |         | 10.51 m   |
| Overhang                                |         | 7.42 m  |
| Pendular arm rotation (top / bottom)    |         | +65 ° / -59.50 °  |
| Platform capacity                       | Q       | 230 kg  |
| Turret rotation                         |         | 360 °   |
| Platform rotation (right / left)        |         | 90 ° / 90 °   |
| Number of people (indoor / outdoor)     |         | 2 / 2   |
| Weight and dimensions                   |         |   |
| Platform weight*                        |         | 7430 kg   |
| Platform dimensions (length x width)    | lp / ep | 1.80 m x 0.80 m   |
| Floor height (access)                   | h20     | 0.43 m  |
| Overall length                          | l1      | 7.79 m  |
| Overall width                           | b1      | 2.32 m  |
| Overall height                          | h17     | 2.47 m  |
| Overall length (stowed)                 | l9      | 5.56 m  |
| Overall height (stowed)                 | h18 *** | 2.56 m  |
| Counterweight offset (turret at 90°)    | a7      | 0.22 m  |
| External turning radius                 | Wa3     | 3.63 m  |
| Ground clearance at centre of wheelbase | m2      | 0.40 m  |
| Wheelbase                               | y       | 2.20 m  |
| Performances                            |         |   |
| Drive speed - stowed                    |         | 5 km/h  |
| Drive speed - raised                    |         | 1 km/h  |
| Gradeability                            |         | 45 %  |
| Permissible leveling                    |         | 5 °   |
| Wheels                                  |         |   |
| Tires type                              |         | Foam-filled   |
| Drive wheels (front / rear)             |         | 2 / 2   |
| Steering wheels (front / rear)          |         | 2 / 2   |
| Braking wheels (front / rear)           |         | 0 / 2   |
| Engine/Battery                          |         |   |
| Engine brand / model                    |         | Kubota - D1105-E4B  |
| Engine norm                             |         | Stage IIIA, Stage V   |
| Engine power (Hp / kW)                  |         | 24.80 Hp / 18.50 kW   |
| Miscellaneous                           |         |   |
| Ground Pressure                         |         | 10 daN/cm2  |
| Hydraulic Pressure                      |         | 340 bar   |
| Hydraulic tank capacity                 |         | 54 l  |
| Fuel                                    |         | 52 l  |
| Daily consumption **                    |         | 4.27 l  |
| Standards compliance                    |         |   |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019 |

\*Varies according to options and standards of the country to which the machine is delivered

### 180 ATJ CR - Dimensional drawing

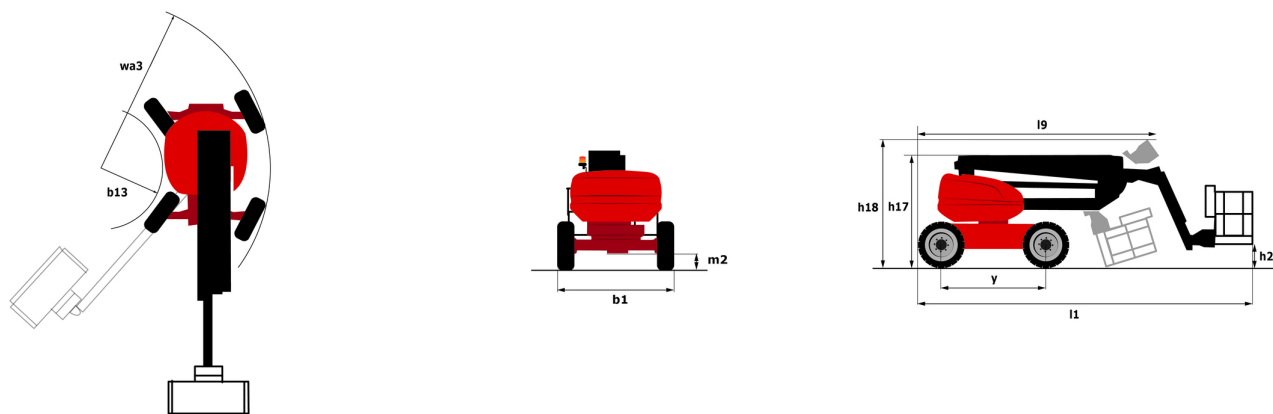

# Equipment

## Standard

220V predisposition in the platform  
3D  
4 simultaneous movements  
4 wheel drive  
4 wheel steer with crab mode  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Backup electrical pump  
Basket 1,800 mm  
CAN bus technology  
Continuous turret rotation  
Differential locking on rear axle  
Driver presence pedal  
Easy Link with 2 year Service  
Emergency stop button in platform and on frame  
Fuel gauge with low level indicator  
Fully galvanized basket with removable floor - Width: 2100 mm (6 ft. 11 in.)  
Hour meter  
Integrated diagnostic assistance  
Key lock on turret cover  
Leveling unlocking  
Load sensing pump  
Oscillating front axle  
Secondary Protection System (SPS)  
Simultaneous steering and turret rotation functions  
Stop & Go system

## Optional

Antitheft digicode  
Battery charger  
Battery cut-off  
Cold weather protection oil  
Diesel tank locking cap  
Electric plug - 230V - In the basket - With differential circuit breaker - Europe (E/F) type  
Engine pre-heater  
Exhaust line protection, spark arrester and fume reduction system  
Galvanized basket - Width: 1800 mm (5 ft. 11 in.) + Side swing gate  
Galvanized basket - Width: 2100 mm (6 ft. 11 in.)  
Galvanized basket - Width: 2100 mm (6 ft. 11 in.) + Side swing gate  
Higher capacity battery, to start the machine easily in cold countries.  
Non-marking tires  
On-board generator (3,5 or 5 kW)  
Personalized paintwork  
Safety kit - Helmet and harness  
Spark arrester muffler  
Water pre-fitting

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes