

Technical sheet :

# 200 ATJ RC ST5



 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                              |         | Metric  |
|---|---------|---|
| Working height                          | h21     | 20.37 m   |
| Platform height                         | h7      | 18.37 m   |
| Maximum outreach                        |         | 11.99 m   |
| Overhang                                |         | 7.97 m  |
| Pendular arm rotation (top / bottom)    |         | +69 ° / -66 °   |
| Platform capacity                       | Q       | 230 kg  |
| Turret rotation                         |         | 360 °   |
| Platform rotation (right / left)        |         | 90 ° / 90 °   |
| Number of people (indoor / outdoor)     |         | 2 / 2   |
| Weight and dimensions                   |         |   |
| Platform weight*                        |         | 10050 kg  |
| Platform dimensions (length x width)    | lp / ep | 2.10 m x 0.80 m   |
| Floor height (access)                   | h20     | 500 mm  |
| Overall length                          | l1      | 8.42 m  |
| Overall width                           | b1      | 2.47 m  |
| Overall height                          | h17     | 2.71 m  |
| Overall length (stowed)                 | l9      | 6.08 m  |
| Overall height (stowed)                 | h18 *** | 3.12 m  |
| Counterweight offset (turret at 90°)    | a7      | 0.12 m  |
| External turning radius                 | Wa3     | 3.90 m  |
| Ground clearance at centre of wheelbase | m2      | 0.44 m  |
| Wheelbase                               | y       | 2.40 m  |
| Performances                            |         |   |
| Drive speed - stowed                    |         | 4.70 km/h   |
| Drive speed - raised                    |         | 0.80 km/h   |
| Gradeability                            |         | 40 %  |
| Permissible leveling                    |         | 5 °   |
| Wheels                                  |         |   |
| Tires type                              |         | Cured-on solid tires  |
| Standard tires                          |         | 1025 x 365 mm   |
| Drive wheels (front / rear)             |         | 2 / 2   |
| Steering wheels (front / rear)          |         | 2 / 2   |
| Braking wheels (front / rear)           |         | 0 / 2   |
| Engine/Battery                          |         |   |
| Engine brand / model                    |         | Yanmar - 3TNV88C  |
| Engine nom                              |         | Stage IIIA  |
| Engine power (Hp / kW)                  |         | 34 Hp / 25.50 kW  |
| Miscellaneous                           |         |   |
| Ground Pressure                         |         | 20.65 dan/cm2   |
| Hydraulic Pressure                      |         | 335 bar   |
| Hydraulic tank capacity                 |         | 80 l  |
| Fuel                                    |         | 78 l  |
| Standards compliance                    |         |   |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019 |


\*Varies according to options and standards of the country to which the machine is delivered

## 200 ATJ RC ST5 - Load chart

Load Chart metric



## 200 ATJ RC ST5 - Dimensional drawing

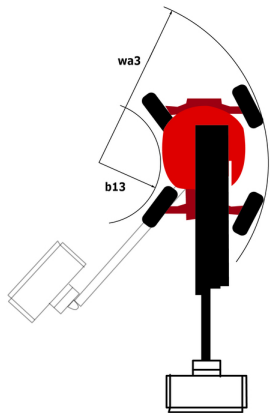

# Equipment

---

## Standard

230V Predisposition  
4 simultaneous movements  
4 wheel drive  
4 wheel steer with crab mode  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Backup electrical pump  
CAN bus technology  
Continuous turret rotation  
Dead man pedal  
Differential locking on rear axle  
Easy Link with 2 year Service  
Emergency stop button in platform and on frame  
Engine compartment with key lock  
Engine with DPF (Diesel Particulate Filter)  
Front axle with limited slip  
Fuel gauge with low level indicator  
Galvanized basket 2,100 mm  
Hour meter  
Integrated diagnostic assistance  
LED rotating beacon  
Large color screen on turret  
Management via engine speed bearing  
Oscillating front axle  
Proportional controls  
Secondary Protection System (SPS)  
Stop & Go system

## Optional

110 or 230V plug with differential circuit breaker  
Battery charger  
Battery cut-off  
Biodegradable hydraulic oil - Grade 32  
Coded anti-start  
Cold weather protection oil  
Engine compartment with key lock  
Fuel tank locking cap  
Galvanized basket 2,100 mm  
High capacity starting battery  
Oil tank locking cap  
On-board generator (3,5 or 5 kW)  
Safety kit - Harness + helmet  
Screen protection on the lower box control  
Socket 230 V + differential circuit breaker  
Water heater



 **MANITOU**  
**HANDLING YOUR WORLD**

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes