Technical sheet:


MC 30-2 ST5





		MC 30-2 313 orcated	011 December 13, 2023 at 0.30 1 W
Ted	chnical characteristics		Metric
1.1 Mai	nufacturer		Manitou
1.2 Mo	del Name		MC 30-2 ST5
1.3 Pov	ver source		Diesel
1.4 Ope	erator type		Seated
1.5 Max	x. capacity	Q	3000 kg
1.6 Loa	d center of gravity	С	500 mm
1.8 Loa	d distance, centre of drive axle to fork	x	626 mm
1.9 Who	eelbase	у	1900 mm
Wei	ight		
	ndard mast reference of the machine		FVD 33
2.1 Ser	vice weight		4220 kg
	ight on front axle (laden) / rear axle (laden)		6570 kg / 650 kg
	ight on front axle (Unladen) / rear axle (Unladen)		1570 kg / 2650 kg
	eels		1070 Ng 7 2000 Ng
	es type	_	Pneumatic
	nensions of front wheels		12,5/80-18/12 SL R4
	nensions of rear wheels		7,00-12/12 ED PLUS
	mber of front wheels / rear wheels		2/2
	mber of drive wheels		2
		b10	1159 mm
	nt wheel gauge	b10	1176 mm
	ir wheel gauge	DIII	1170 111111
	nensions	h6 / h6*	2155 mm / 1000 mm
	ght of overhead guard (cabin) / Overall height of low overhead guard (Buggie version)	h6 / h6*	2155 mm / 1990 mm
	t height/stand height	h7	1034 mm
	erall length	11	4265 mm
	igth to face of forks	12	3085 mm
	erall width	b1	1450 mm
	ks section x width x length	s / e / l	45 mm x 100 mm / 1200 mm
	k carriage ISO 2328 (class/form) A/B		3A
	k carriage width	b3	1260 mm
	und clearance below mast	m1	300 mm
	und clearance at centre of wheelbase	m2	320 mm
	le width for 1000 x 1200 pallet widthways	Ast	4626 mm
	ning radius	Wa	2650 mm
	formances		
	vel speed (laden / unladen)		12 km/h / 24.50 km/h
	ing speed (laden / unladen)		0.47 m/s / 0.46 m/s
	vering speed (laden / unladen)		0.50 m/s / 0.30 m/s
	wbar pull (Laden / Unladen)		1700 daN / 910 daN
	deability (laden / unladen)		24 % / 22 %
5.10 Ser	vice brake		Hydraulic brakes by loss of pressure
Trai	nsmission type		Hydrostatic
Eng	gine		
7.1 Eng	jine brand / model / norm		Kubota / D1803 CRT E5B / Stage V
7.2 Eng	jine power (Hp / kW)		50 Hp/37 kW
7.3 Rate	ed speed		2700 rpm
7.4 Nur	mber of cylinders / Capacity of cylinders		3 - 1826 cm³
Mis	cellaneous		
8.1 Typ	e of drive control		Electronic
	rking hydraulic pressure for attachments		220 bar
8.3 Oil	flow rate for attachments		42 l/min
	and level at the driver's ear according to DIN 12 053		79 dB

MC 30-2 ST5 - Dimensional drawing

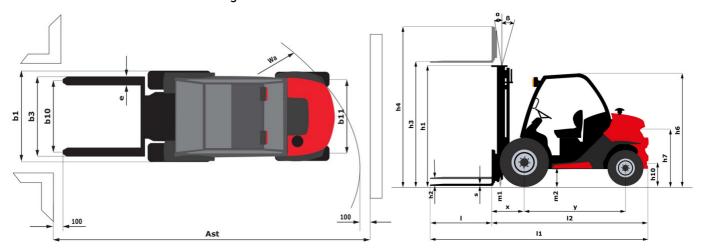

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	۰
β - Mast/fork carriage tilt, backward	۰
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max heigth	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVD 33	FVD 37	FVD 45
12	12	12
10	10	10
2338	2598	3038
117	117	117
3300	3700	4500
4090	4490	5290
1400	1400	500
1400	1400	500
2700	2700	2800
2700	2700	2800

Free Lift Triplex (FLT)		FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55
α - Mast/fork carriage tilt, forward	٠	12	12	12	12	12	6
β - Mast/fork carriage tilt, backward	٠	10	10	10	10	10	6
h1 - Mast lowered height	mm	1988	2088	2188	2338	2438	2788
h2 - Mast free lift	mm	1235	1335	1435	1585	1685	2035
h3 - Mast lifting height	mm	3400	3700	4000	4300	4700	5500
h4 - Mast extended height	mm	4236	4536	4836	5136	5536	6336
Residual capacity at max height	kg	1900	1500	1300	1400	430	500
Residual capacity with hooked-on side shift at max heigth	kg	1800	1400	1250		400	400
Height at max capacity	mm	2700	2600	2700	3100	2700	2500
Height at max capacity with hooked-on sideshift	mm	2700	2600	2700		2700	2500

Full Visibility Triplex (FVT)		FVT 33
α - Mast/fork carriage tilt, forward	۰	12
β - Mast/fork carriage tilt, backward	۰	10
h1 - Mast lowered height	mm	1878
h2 - Mast free lift	mm	129
h3 - Mast lifting height	mm	3300
h4 - Mast extended height	mm	4079
Height at max capacity	mm	2500





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes