


Technische fiche :

MI 60 D ST5



Technical characteristics			Metrisch	
1.1	Manufacturer			MANITOU
1.2	Model Name			MI 60 D ST5
1.3	Power source			Diesel
1.4	Operator type			Seated
1.5	Max. capacity	Q		6000 kg
1.6	Load center of gravity	c		600 mm
1.8	Load distance, centre of drive axle to fork	x		598 mm
1.9	Wheelbase	y		2300 mm
	Standard mast reference of the machine			FVD 30
Weight				
2.1	Service weight			9210 kg
2.2	Weight on front axle (laden) / rear axle (laden)			13340 kg / 1870 kg
Wheels				
3.1	Tires type			Super Elastic
3.2	Dimensions of front wheels			8.25-15 14PR
3.3	Dimensions of rear wheels			8.25-15 14PR
3.5	Number of front wheels / rear wheels			4 / 2
3.5.2	Number of drive wheels			2
3.6	Front wheel gauge	b10		1489 mm
3.7	Rear wheel gauge	b11		1700 mm
Dimensions				
4.7	Height of overhead guard (cabin)	h6		2430 mm
4.8	Seat height/stand height	h7		1350 mm
4.12	Height of towing bar (coupling height)	h10		710 mm
4.19	Overall length	l1		4729 mm
4.20	Length to face of forks	l2		3529 mm
4.21	Overall width	b1		1990 mm
4.21	Overall width - Twinned wheels	b1		1990 mm
4.22	Forks section / width / length	s / e / l		60 mm x 150 mm x 1220 mm
4.23	Fork carriage ISO 2328 (class/form) A/B			4A
4.24	Fork carriage width	b3		1700 mm
4.31	Ground clearance below mast	m1		190 mm
4.32	Ground clearance at centre of wheelbase	m2		270 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast		5280 mm
4.36	Internal turning radius (over tyres)	b13		110 mm
Performances				
5.1	Travel speed (laden / unladen)			23 km/h-24 km/h
5.2	Lifting speed (laden / unladen)			0.36 m/s-0.46 m/s
5.3	Lowering speed (laden / unladen)			0.48 m/s-0.42 m/s
5.5	Drawbar pull (Laden / Unladen)			6430 daN / 2670 daN
5.7	Gradeability (laden / unladen)			20 % / 20 %
5.10	Service brake			Hydraulic
Engine				
7.1	Engine brand / model			Deutz / TCD 3.6 L4
7.2	I.C. Engine power rating			55.40 kW
7.3	Rated speed			2300 rpm
7.4	Number of cylinders / Capacity of cylinders			4 - 3621 cm³
Miscellaneous				
8.3	Oil flow rate for attachments			165 l/min
8.4	Measured/guaranteed mean noise level at the ear of the operator			< 84 dB

MI 60 D ST5 - Tekening met afmetingen

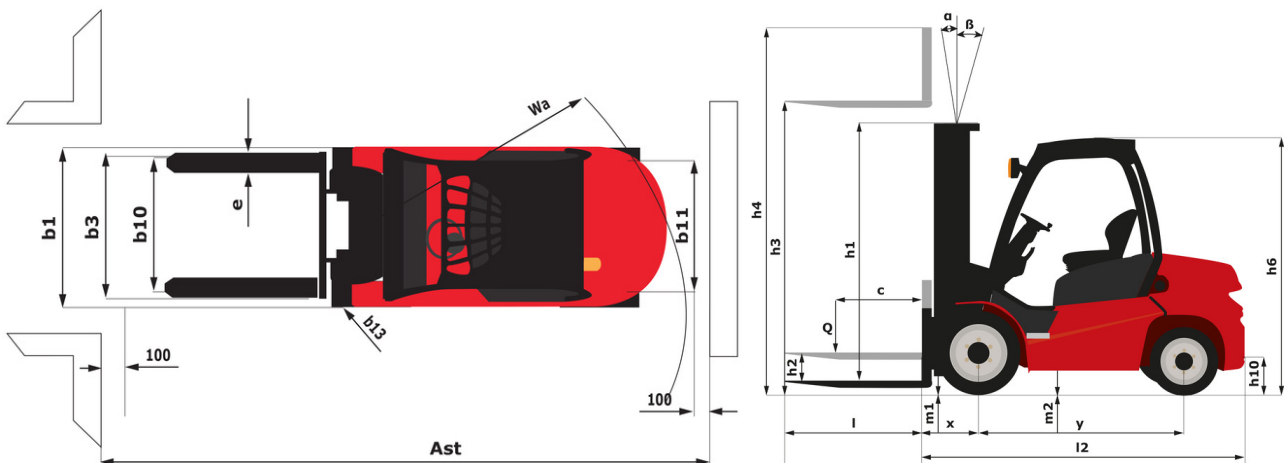

Kenmerken van de masten en restcapaciteiten

Full Visibility Duplex (FVD)	FVD 30	FVD 33	FVD 36	FVD 40	FVD 45	FVD 50
α - Mast/fork carriage tilt, forward	6	6	6	6	6	6
β - Mast/fork carriage tilt, backward	12	12	12	12	6	6
h1 - Mast lowered height	2500	2650	2800	3000	3300	3550
h2 - Mast free lift	160	160	160	160	160	160
h3 - Mast lifting height	3000	3300	3600	4000	4500	5000
h4 - Mast extended height	3995	4295	4595	4995	5500	6000
Residual capacity at max height	6000	6000	6000	6000	6000	6000
Residual capacity with hooked-on side shift at max height	5500	5500	5500	5500	5500	5500
Height at max capacity	3000	3300	3600	4000	4500	5000
Height at max capacity with hooked-on sideshift	3000	3300	3600	4000	4500	5000

Free Lift Duplex (FLD)	FLD 30	FLD 33	FLD 36	FLD 40
α - Mast/fork carriage tilt, forward	6	6	6	6
β - Mast/fork carriage tilt, backward	12	12	12	12
h1 - Mast lowered height	2450	2600	2750	2950
h2 - Mast free lift	1495	1645	1795	1995
h3 - Mast lifting height	3000	3300	3600	4000
h4 - Mast extended height	3955	4255	4555	4955
Residual capacity at max height	6000	6000	6000	6000
Residual capacity with hooked-on side shift at max height	5500	5500	5500	5500
Height at max capacity	3000	3300	3600	4000
Height at max capacity with hooked-on sideshift	3000	3300	3600	4000

Free Lift Triplex (FLT)	FLT 45	FLT 48	FLT 50	FLT 55	FLT 60
α - Mast/fork carriage tilt, forward	6	6	6	3	3
β - Mast/fork carriage tilt, backward	6	6	6	6	6
h1 - Mast lowered height	2725	2825	2875	3075	3225
h2 - Mast free lift	1500	1600	1672	1800	2000
h3 - Mast lifting height	4500	4800	5000	5500	6000
h4 - Mast extended height	5735	6035	6213	6785	7235
Residual capacity at max height	5500	5500	5500	5200	5000
Residual capacity with hooked-on side shift at max height	5000	5000	5000	4700	4500
Height at max capacity	4500	4800	5000	5500	6000
Height at max capacity with hooked-on sideshift	4500	4800	5000	5500	6000



 **MANITOU**
HANDLING YOUR WORLD

Hoofdkantoor

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Frankrijk

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

www.manitou.com



Deze brochure beschrijft versies en con guratie-opties voor Manitou-producten die met verschillende apparatuur kunnen worden uitgerust. De uitrusting die in deze brochure wordt beschreven, kan standaard, optioneel of niet leverbaar zijn, afhankelijk van de uitvoering. Manitou behoudt zich het recht voor om de weergegeven en beschreven speci caties op elk moment en zonder kennisgeving vooraf te wijzigen. De fabrikant is niet aansprakelijk voor de gegeven speci caties. Neem voor meer informatie contact op met uw Manitou-dealer. Niet-contractueel document. De productbeschrijvingen kunnen afwijken van de werkelijke producten. De lijst met speci caties is niet allesomvattend. De logo's en visuele identiteit van het bedrijf zijn eigendom van Manitou en mogen niet zonder toestemming worden gebruikt. Alle rechten voorbehouden. De foto's en diagrammen in deze brochure zijn uitsluitend bedoeld voor raadpleging en informatie.

MANITOU BF SA - Naamloze vennootschap met raad van bestuur - Aande- lenkapitaal: 39.668.399 euro - 857 802 508 RCS Nantes