


Ficha técnica :

MI-X 80 D



| Technical characteristics | | Métrico | |
|---------------------------|---|-----------|--------------------------|
| 1.1 | Manufacturer | | Manitou |
| 1.2 | Model Name | | MI-X 80 D |
| 1.3 | Power source | | Diesel |
| 1.4 | Operator type | | Seated |
| 1.5 | Max. capacity | Q | 8000 kg |
| 1.6 | Load center of gravity | c | 600 mm |
| 1.8 | Load distance, centre of drive axle to fork | x | 705 mm |
| 1.9 | Wheelbase | y | 2500 mm |
| Weight | | | |
| 2.1 | Service weight | | 11790 kg |
| 2.2 | Weight on front axle (laden) / rear axle (laden) | | 17670 kg / 2120 kg |
| Wheels | | | |
| 3.1 | Tires type | | Pneumatic |
| 3.2 | Dimensions of front wheels | | 9.00-20-14PR |
| 3.3 | Dimensions of rear wheels | | 9.00-20-14PR |
| 3.5 | Number of front wheels / rear wheels | | 4 / 2 |
| 3.5.2 | Number of drive wheels | | 4 |
| 3.6 | Front wheel gauge | b10 | 1628 mm |
| 3.7 | Rear wheel gauge | b11 | 1700 mm |
| Dimensions | | | |
| 4.7 | Height of overhead guard (cabin) | h6 | 2580 mm |
| 4.8 | Seat height/stand height | h7 | 1505 mm |
| 4.12 | Height of towing bar (coupling height) | h10 | 505 mm |
| 4.19 | Overall length | l1 | 5395 mm |
| 4.20 | Length to face of forks | l2 | 3895 mm |
| 4.21 | Overall width | b1 | 2165 mm |
| 4.21 | Overall width - Single wheels | b1 | 2165 mm |
| 4.22 | Forks section / width / length | s / e / l | 75 mm x 160 mm x 1520 mm |
| 4.23 | Fork carriage ISO 2328 (class/form) A/B | | 4A |
| 4.31 | Ground clearance below mast | m1 | 185 mm |
| 4.32 | Ground clearance at centre of wheelbase | m2 | 339 mm |
| 4.33 | Aisle Width for pallets 1000 x 1200 crossways | Ast | 5637 mm |
| 4.34 | Aisle width for 800 x 1200 pallet lengthways | Ast | 5803 mm |
| 4.36 | Internal turning radius (over tyres) | b13 | 1327 mm |
| Performances | | | |
| 5.1 | Travel speed (laden / unladen) | | 28 km/h-32 km/h |
| 5.2 | Lifting speed (laden / unladen) | | 0.43 m/s-0.46 m/s |
| 5.3 | Lowering speed (laden / unladen) | | 0.45 m/s-0.36 m/s |
| 5.5 | Drawbar pull (Laden / Unladen) | | 7860 daN / 4500 daN |
| 5.7 | Gradeability (laden / unladen) | | 44 % / 44 % |
| 5.10 | Service brake | | Hydraulic |
| Engine | | | |
| 7.1 | Engine brand / model | | Cummins / QSB4,5 |
| 7.2 | I.C. Engine power rating | | 82 kW |
| 7.3 | Rated speed | | 2200 rpm |
| 7.4 | Number of cylinders / Capacity of cylinders | | 4 - 4500 cm³ |
| Miscellaneous | | | |
| 8.3 | Oil flow rate for attachments | | 180 l/min |
| 8.4 | Measured/guaranteed mean noise level at the ear of the operator | | < 88 dB |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | 88 dB |

MI-X 80 D - Diagrama dimensional

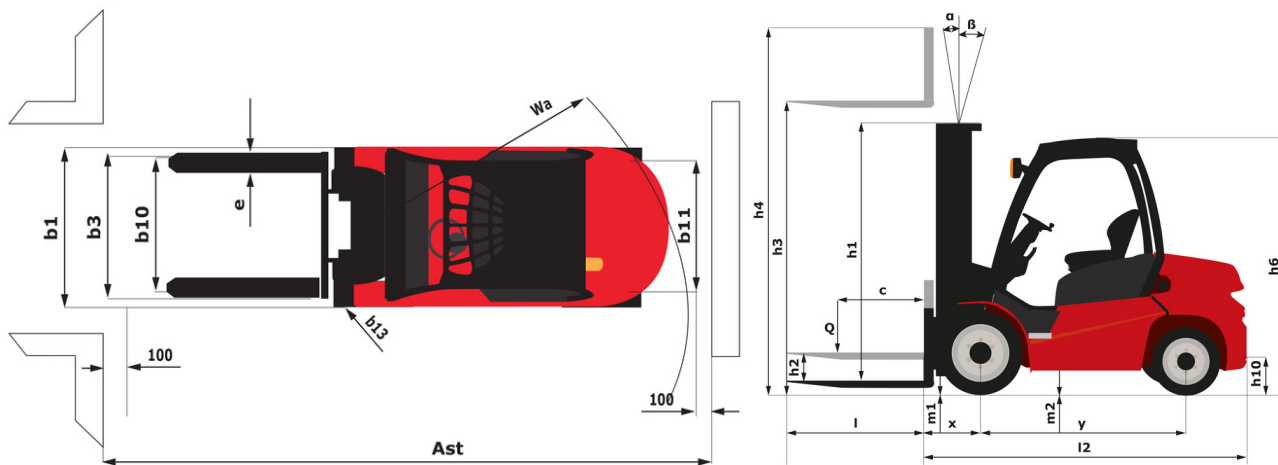

Características de los mástiles y capacidad residual

| Full Visibility Duplex (FVD) | | FVD 30 | FVD 33 | FVD 36 | FVD 40 | FVD 45 | FVD 50 |
|---------------------------------------|----|--------|--------|--------|--------|--------|--------|
| α - Mast/fork carriage tilt, forward | ° | 6 | 6 | 6 | 6 | 6 | 6 |
| β - Mast/fork carriage tilt, backward | ° | 12 | 12 | 12 | 12 | 6 | 6 |
| h1 - Mast lowered height | mm | 2700 | 2850 | 3000 | 3200 | 3500 | 3750 |
| h2 - Mast free lift | mm | 200 | 200 | 200 | 200 | 200 | 200 |
| h3 - Mast lifting height | mm | 3000 | 3300 | 3600 | 4000 | 4500 | 5000 |
| h4 - Mast extended height | mm | 4210 | 4510 | 4810 | 5210 | 5710 | 6210 |
| Residual capacity at max height | kg | 8000 | 8000 | 8000 | 8000 | 8000 | 8000 |
| Height at max capacity | mm | 3000 | 3300 | 3600 | 4000 | 4500 | 5000 |

| Free Lift Triplex (FLT) | | FLT 45 | FLT 48 | FLT 50 | FLT 55 | FLT 60 |
|---------------------------------------|----|--------|--------|--------|--------|--------|
| α - Mast/fork carriage tilt, forward | ° | 6 | 6 | 6 | 3 | 3 |
| β - Mast/fork carriage tilt, backward | ° | 6 | 6 | 6 | 6 | 6 |
| h1 - Mast lowered height | mm | 2750 | 2850 | 2950 | 3100 | 3250 |
| h2 - Mast free lift | mm | 1485 | 1585 | 1600 | 1800 | 1985 |
| h3 - Mast lifting height | mm | 4500 | 4800 | 5000 | 5500 | 6000 |
| h4 - Mast extended height | mm | 5775 | 6075 | 6360 | 6810 | 7275 |
| Residual capacity at max height | kg | 7000 | 7000 | 6500 | 6100 | 5600 |
| Height at max capacity | mm | 4500 | 4800 | 5000 | 5500 | 6000 |



Oficina Central

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes